

# Janser

# THE FITTING ANSWER

# Welcome to the new edition Janser Basics Catalogue

Janser U.K. is pleased to present our new 'Janser Basics' product catalogue, a supplement to our full catalogue.

The concept of this brochure is to present a range of popular core products from our main catalogue in a clear, attractive manner. The range illustrated provides all the key products for the preparation and installation of most flooring materials.

To order from this catalogue simply quote the order number in the orange code boxes next to the product...

**Order Code** 

Should you require our full catalogue or further information please contact our helpline on.



© Copyright:- The copyright of this catalogue is owned by Janser UK Ltd. and may not be reproduced in any way or form without the express permission Janser U.K. Ltd.

Trade Marks:- 'Janser', 'Dolphin', the symbol of the leaping dolphin above waves, 'maestri by Janser' are registered trade marks of Janser and may not be reproduced or used in any form without the written permission of this company.

Products:- Janser U.K. Ltd. reserve the right to change the specification of any product contained in this catalogue without notice. All descriptions of products are for guidance only.

# CONTENTS

#### **SUBFLOOR PREPARATION**

1-32

- Columbus
   Vacuums
   Strippers
- Scrapers Claws Grind Stones Aeration Rollers
- Trowels Protimeter Moisture Indicators

33-41

- Green box Titan Stanley Knives
- Cutters
   Shears
   Gripper Shears
   Metal Shears
- Cookie Cutters
   Syringes
   Repair Tools

#### **VINYL GROOVING & CUTTING**

42-56

- Auto-Groovers Hand Groovers
- Leister Welding Hand Rollers Hot-Jet Nozzles
- Spatulas Mozart Trimming Tools Cold Weld
- Scribers Dividers

#### **RULES & ROLLERS**

57-58

- Roll-up Rulers Door Rulers
- Invisiseamer T-Rule Hand-Rollers Lino Rollers
- Wall Rollers
   Tile Cutters

#### **FLOOR TILE CUTTERS**

59

• Tile Cutters • LVT Cutters

#### **CARPET FITTING**

60-73

- Tapes Disto Kickers
- Chalk Line & Chalk Stair Tools Hammers Drive Bars
- Kneepads Irons Heat Tape Seam Rollers
- Glu-Guns Staplers Spotnailers Compressors

#### **WOOD & LAMINATE FLOORING**

74-81

- Door Trimmers Jamb Saws
- Hand Saws Templates Sharpeners Fein Multimaster
- Spacers Shunters Tapping Blocks Wax Kits
- Laminate Guillotines Portanailers Sanding Abrasives

#### MISCELLANEOUS PRODUCTS

82-92

- Tapes Rollers & Frames Skeleton
- Nails Drill Bits Gimps Tap-its Rawl Plugs
- Spray Adhesive
   Handling & Lifting
   Work Clothing
- Tool Boxes Packaging Whipping & Cutting

# COLUMBUS single-disc buffing & levelling machine

#### Mod.135 SH

#### **TECHNICAL SPECIFICATIONS**

230V or 110V Power supply Motor power 1200 Watt (1.5HP) Ø375mm (14 ¾") Working width Speed 140rpm Weight 42kg (93lbs)

#### Mod. 135 SH

MACHINE

240V

112 455 000

**ONLY** 120V 112 455 600

# **Dust Extraction Ring** Vacuum not included **Dust extraction ring** 113 700 000

This machine will mill, grind and sand your floor surface whilst creating a minimum of dust - thus helping to maintain a healthier working environment. All types of plaster, screed, asphalt and adhesive along with small surface irregularities can be removed from the subfloor with ease.

On parquet floors the Columbus is ideal for sanding immediately before and between sealing and varnishing coats. It can then be used for surface cleaning, polishing and the applying of sealing wax.



MACHINE+ UNIVERSAL PLATE 240V 120V

mbus MULTIPERINE

> 112 455 001 112 455 601

#### **COLUMBUS - 3 PLATE STARTER KIT**

#### **TECHNICAL SPECIFICATIONS**

230V or 110V Power supply Motor power 1200 Watt (1.5HP) Working width Ø375mm (14 ¾") 140rpm Speed 42kg (93lbs) Weight

#### Start-up Kit comprising:

- Columbus machine
- Grinding plate
- 1 x Universal plate
- 1 x Abrasive plate

The 3-gear planetary transmission is designed to cope with the toughest tasks.



#### Mod. 135 SH - 1200W

240V Columbus Kit 120V Columbus Kit

112 455 800 112 455 900

#### Completely eliminates all unwanted material adhered to your subfloor!

This machine will mill, grind and sand your floor surface while creating a minimum of dust - thus helping to maintain a healthier working environment.

The robust design and construction of the Columbus ensures long life and good reliability.

By raising and lowering of the lever, the machine glides across the surface in semicircles. All types of plaster, screed, asphalt and adhesive along with small surface irregularities can be removed from the subfloor with ease.

WHITE THE PARTY OF THE PARTY OF

With a wide range of working plate options to suit all types of floor surfaces, the machine is unsurpassed in saving you time and effort. Working plates, discs and brushes can be changed in seconds.

All Columbus-Models are delivered without grinding plate and without dust extractor.



#### Multi Vac III Dust Extraction Ring

#### **Dust Extraction System MULTI VAC 1**

Multi-Vac III can remain fixed to machine after installation.



MACHINE ACCESSORIES FOR COLUMBUS

to fit models:

Model 135 SH - 1200 Watts Model 145 SH - 1500 Watts Model 155 S - 2000 Watts

Loose installation.

113 700 000

#### **Universal Plate**

For accepting sandpaper discs, sanding gauze discs and abrasive pads.
For model 135/145/155

112 334 000

113 722 000



Universal Plate with Distance Ring

For accepting sandpaper discs, sanding gauze discs and abrasive pads.
For model 135/145/155



**Grinding Plate Rubber** 

Thick rubber based plate for carrying sandpaper, gauzes etc.

112 306 000



112 334 100

#### Grinding Plate - Grit 20

With 6 rectangular grinding stones, replaceable  $75 \times 90 \text{mm} (3 \times 3 \frac{1}{2})$ 

For grinding of plaster and levelling compound, removal of residual paint and gypsum, smoothing of slight unevenness.

For model 145/155

**Grinding Plate** 

112 332 000



Spare Stone 161 515 003

#### **Steel Brush**

Wire length 45mm (1 1/4")
For removal of foam backing, adhered residual underlay and carpet backing for industrial floor cleaning.

For model 145/155

112 319 000

#### **Pot Brush Disc**

For removing the metallic layer that builds up between anhydrite and magnesite screed materials. Also for the removal of residual foam backing, plaster splatter, residual paint coatings,



Ø375mm (14  $\frac{1}{4}$ ") Stone Disc Replacement stone - 1 piece

112 346 000 112 346 001

#### **CLEANING MAINTENANCE PADS**

#### 25mm thick. Ø410mm



For fixing grinding gauze and cleaning old wax etc. and ceramics

Black 783 000 360



For removing stubborn dirt/stains from resilient flooring

Brown 783 000 370



For cleaning most surfaces.

Blue **783 000 380** 

# Pad GREEN

For cleaning and polishing (medium) & wet cleaning of tiles.

Green 783 000 350



For cleaning and general maintenance.

783 000 390



For polishing and oiling - high gloss.

White **783 000 400** 

#### **GRINDING GAUZES**

Ø 410 (16 1/8") for model 135 / 145 / 155

Grit 60	783 000 045
Grit 80	783 000 047
Grit 100	783 000 050
Grit 120	783 000 055
Grit 150	783 000 057
Grit 180	783 000 060
Grit 220	783 000 062
Grit 320	783 000 064



#### **SANDING MATS**

**Gr. 40 coarse** - for sanding wood

Gr. 80 medium - for "between treatment" sanding

**Gr. 280 fine** - for cutting sealing floor surfaces

For Models 135 / 145 / 155

Grit 40	783 000 140
Grit 80	783 000 180
Grit 280	783 000 280



SPECIAL MAT (not illustrated)

For parquet intermediate sanding and for removing wax residue and oil.

783 000 022

#### **SANDING PAPERS**

#### Sandpaper, Double-sided

#### Disc Ø = 375mm 15"

#### For Columbus Machines

Double-sided diameter of the boring is 40mm

Grit 12	Coarse	<b>112 309 000</b> `
Grit 16	Coarse	112 311 000
Grit 24	Coarse	112 312 000
Grit 30	Medium	112 313 000
Grit 40	Medium	112 314 000
Grit 60	Medium	112 315 000
Grit 80	Fine	112 316 000
Grit 100	Fine	112 317 000
Grit 120	Fine	112 318 000

#### $Disc \emptyset = 400mm$

16"

#### For Non Columbus Machines

Grit 16	Coarse	<b>112511000</b>
Grit 24	Coarse	112 512 000
Grit 30	Medium	112 513 000
Grit 40	Medium	112 514 000
Grit 60	Medium	112 515 000
Grit 80	Fine	112 516 000
Grit 100	Fine	112 517 000
Grit 120	Fine	112 518 000

#### Disc Ø = 430mm 17

#### For Non Columbus Machines

Grit 16	Coarse	112611000
Grit 24	Coarse	112 612 000
Grit 30	Medium	112 613 000
Grit 40	Medium	112 614 000
Grit 60	Medium	112 615 000
Grit 80	Fine	112 616 000
Grit 100	Fine	112 617 000
Grit 120	Fine	112618000

#### **ABRASIVE DISCS** (Double-sided)

A thin steel disc with randomly scattered red hardmetal fragments welded to the surface. For roughing the surface of anhydrite and screed. Also suitable for levelling off surfaces.

#### $Disc \emptyset = 375mm$ 15"

#### For Columbus Machines

Grit 14	Coarse	112 308 000
Grit 24	Medium	112 308 024
Grit 36	Fine	112 308 036

#### Disc Ø = 400mm 16"

#### For Non Columbus Machines


Grit 14	Coarse	112 520 000
Grit 24	Medium	112 520 024
Grit 36	Fine	112 520 036

#### $Disc \emptyset = 430mm$ 17

#### For Non Columbus Machines

Grit 14	Coarse	112 815 000
Grit 36	Fine	112 815 036

#### **METAL FRAGMENTS**

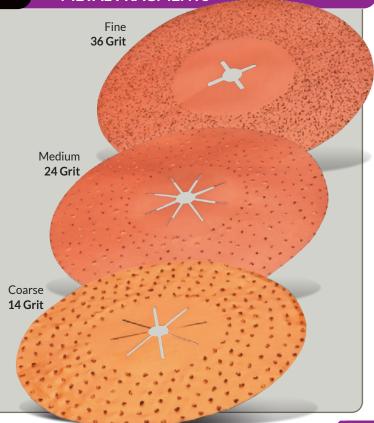

## COLUMBUS - Models 145 & 155

#### Mod. 145 SH - 1500W

#### **TECHNICAL SPECIFICATIONS**

Power supply 230V Motor power 1500 Watt (2.0HP) Working width Ø375mm (14 ¾") Speed 140rpm

Weight 42kg (93lbs)

230V

112 560 000

#### Mod. 155 S - 2000W

#### TECHNICAL SPECIFICATIONS

230V Power supply 2000 Watt (2.5HP) Motor power Working width Ø375mm (14 ¾") Speed 140rpm Weight 50kg (110lbs)

230V

112 750 000


The ultimate machines for the removal of stubborn subfloor material.

These machines utilise all of the standard Columbus discs, but also the range of diamond discs illustrated below.

All discs changeable in seconds (no tools required) giving unrivalled specification and performance.



#### **Diamond Disc with 5 Segments**



With especially designed high quality diamond grinding segments to increase the capacity and efficiency of your Columbus Machine in terms of subfloor preparation.

#### Main uses:

Grinding of screed, removing sinter surfaces (anhydrite), adhesive residue, levelling compounds, thin coatings and painted surfaces.

> **Diamond Disc** 112 381 000



**Diamond Sanding Segment Grit 30 GREY** 

112 381 070



**Diamond Sanding Segment Grit 30** YELLOW

112 381 080



Spare Segment - 1 Piece RED

112 381 050

#### COLUMBUS DIA-DISC Grinding Plates

#### **DIA DISC-Gold**

Grinding of screed, removing sinter surfaces (anhydrite), adhesive residues, levelling compounds, thin coatings and painted surfaces.

Complete with 5 PCD split segments.

**DIA DISC Gold** 

112 381 300

Spare segments for DIA-DISC Gold PCD split diamond segment



**Gold Segment** 

#### **HEXA PLATE**

#### with 6 diamond segments

For grinding hard surfaces such as concrete or levelling compounds.

Larger area coverage makes this plate more effective than other diamond plates, especially when grinding plaster and anhydite screed.



Hexa Plate

112 353 500

#### **Replacement Parts**

Diamond segment complete with input unit.

1 piece

112 353 020

Replacement diamond segment.

112 353 010

# **DUST EXTRACTION**

#### JANVAC 1600-H

#### **Power Dust Extractor**

#### Improved version of our successful model JANVAC 1600-H

Dust extractors are well suited for extracting sanding dust, cleaning building sites and vacuuming tools such as grinding machines and hand grinders. Advantages of all JANVAC models:

- self-cleaning Teflon-coated tube filter
- main filter BIA Dust category M
- micro filter BIA Dust category H14
- continuous high suction
- filter cleans itself during operation
- low noise level
- additional socket for machines with tracking and automatic power on
- trolley frame with large wheels

#### **IMPROVED** features

- new 5 m elastic hose
- new 1450W motor with improved vacuum (3100 mm H 2 O)
- Purging ring and adapter ring modified for better airflow
- reinforced HEPA filter attachment
- new bayonet coupling
- practical bag holder
- new synthetic collection bag
- Plug for boiler sealing

# **TECHNICAL SPECIFICATIONS**

Power Supply: 120V or 240V 1100Watt (1.5HP) Motor Power: Working width: 425mm (1 ½") Weight:

15kg (33lbs)

115 095 260

120V

240V

STANDARD ACCESSORIES:

5 m grey suction hose Ø 38 mm (1 3/8") rolling floor nozzle  $45 \, \text{cm} \, (1 \, \%")$ 

suction pipe, suction nozzle for joints

JANVAC 1600-H

**Dust Collection Bag, synthetic** 

115 095 500

115 095 000

ACCESSORIES: there are a large range of accessories available, please see our main catalogue.

# COLUMBUS and JANVAC 1600 H KIT

This machine will mill, grind and sand your floor surface while creating a minimum of dust, helping to maintain a healthier working environment.

The strong design and well-built construction of the Columbus ensures long machine life and good reliability.

By raising and lowering the lever, the machine glides across the surface in semicircles. All types of plaster, screed, asphalt and adhesive along with small surface irregularities can be removed from the subfloor with ease.

The wide range of sanding plates make the Columbus suitable for all types of floor surfaces. The machine isunsurpassed in saving time and effort, with sanding plates, discs and brushes changeable in seconds.

The 3-gear planetary transmission is designed to cope with the toughest tasks.

Included with Model 135

Work in a nearly dust-free environment with the MULTI-VAC dust extractionring and JANVAC 1600 dust extractor.



Pictured is the Columbus with MULT-VAC I dust extraction ring and JANVAC 1600-H dust extractor.

With the Dust Extraction System MULTI-VAC in combination with a strong vacuum cleaner like the JANVAC, grinding or sanding can be done in a nearly dust-free environment.

H is the highest category for dust removal.

112 456 000 240V KIT 112 456 900 **120V KIT** 

# **DUST EXTRACTION**

#### JANVAC 3600-H

#### 3000 Watt delivers great suction power

NEW

The perfect Janvac for connection to powerful frinding/sanding machines. Features 3 x 1100 watt motors that can be switched on individually to reduce/increase suction power as needed dependant on site conditions.

Supplied complete with:



- Teflon-coated channel filter and HEPA filter
- Continuous filter cleaning and removeable lower dust container
- Robust chassis with HD smooth running castors

#### **TECHNICAL SPECIFICATIONS**

3300 W Input power: max 270 m<sup>3</sup>/h Air volume: 50mm x 5m Hose Øx1. Tank: 35L

1120 x 770 x 670mm Dimensions:

Weight: 40kg

JANVAC 3600-H

115-097-800

Janvac

# **JANVAC Separator**

#### INCLUDED IN DELIVERY:

1x hose 3.5 m (10') with hose couplings

1x dust bag 50 L incl. cable ties

1x cardboard tube

1x 90° connection adaptor Earthing feature as standard

#### **JANVAC Separator**

115 101 000

#### Dust Bags (x10)

Plastic 50L incl. fastener 115 101 010





janser

Separator showing use with COLUMBUS and JANVAC

#### JANVAC LP - Series

Single-phase industrial vacuum cleaners, suitable for safe operation in any environment or application where large quantities of dust to be vacuumed. H class filters in series and a fully automatic filter cleaning system, are key arguments.

The disposal of the vacuumed material is facilitated by the use of collection bags that, once sealed, prevent contamination of the work environment during disposal and provide additional safety for the health of the operator.

#### **AUTOMATIC CLEANING OF FILTERS**

The cleaning system guarantees constant suction, ensuring the cleanliness of the filters without any intervention from the operator and without interrupting operation as the filters are periodically cleaned by the vibrating action. These models have been designed to meet the requirements of continuous and extended vacuum cleaning, being particularly suitable when they are coupled with machines in operation.

The cleaning system allows automatic filter cleaning without ever interrupting the vacuum cleaning process, ensuring a constant and efficient suction power. Each of the fitted filters is periodically cleaned by the vibrating action.

Unique (22m) continuous bag system. Simply cut and seal - the next section is ready for use.

No delay or mess!

#### FILTERING SYSTEM

The external part of the filter is made using conductive material, a property that allows discharge of the electrostatic current generated during vacuum cleaning. The internal part, thanks to the use of the HEPA filter, is able to filter 99.995% of dust with 0.3 µ particles, making the work environment safer and free of dust.

The filters are contained in stainless steel cylinders that serve as protection against sucked materials that might be corrosive or abrasive.

#### SPECIAL features

- HEPA filter with PTFE membrane
- Patented filter cleaning system
- Filter Cleaning during operation
- Robust metal frame with large wheels for easy transportation and best job site management
- Anti-static discharge set up



#### STANDARD ACCESSORIES:

- suction hose Ø 38 mm 5 m (1 3/8" 16' 5") complete with connectors
- rolling floor nozzle 45 cm (1' 5 ¾"),
- handpipe Ø 38 mm (1 3/8"),
- suction nozzle for joints,
- 1 x Longopac 22 m (72')

#### JANVAC 340 LP

240V 115 021 000 120V 115 021 500

#### **Longopac Spare bags**

4 x 22m (24yd)

115 097 720

# **DUST EXTRACTION**

#### JANSER Cyclone Separator

#### 2 applications - 1 device

A separator for subfloor preparation which can be used as stirring station as well.

- Can be attached to any extractor with 50mm connector
- Saves space in the vehicle

#### **TECHNICAL SPECIFICATIONS**

Dimensions: 96 x 46 x 60cm
Weight: 14kg
Support: Ø 50mm
Hose length including 3.5m

connection pieces:
Capacity:
Extractor Connection:
50/76 mm

**Cyclone Separator** 

115 102 000



#### **DELIVERY**

JANSER Separator including:

- chassis with swivel castor
- 75 L bucket
- cyclone attachment
- 3.5m suction hose with connection sleeves



#### **SPARE ACCESSORIES**



115 102 100

Cyclone Top Unit





#### **FLEX HF 125 COMPACT GRINDER**



Complete with:

- container
- suction casing
- suction hose 3.5m (11") (without sanding disc)

This compact, powerful machine grinds right up to the edge.

A nearly dust-free operation is guaranteed when connected to the JANVAC industrial dust extractor. (suction hose included)

#### **TECHNICAL SPECIFICATIONS**

Power supply 230V

 $\begin{array}{ll} \mbox{Motor power} & 1400 \, \mbox{Watt} \, (1.9 \mbox{HP}) \\ \mbox{Working width} & 125 \, \mbox{mm} \, (4 \, \mbox{\%}) \\ \mbox{Speed} & \mbox{variable} \, 2100 \mbox{-} 7500 \mbox{rpm} \end{array}$ 

Weight 3.6kg (7.9 lbs)

#### Hand Grinder HF 125

Compact Grinder 114 200 000

#### **ACCESSORIES - Discs purchased separately to machine**

#### **Diamond Disc**

Available in three different strengths for optimum adaptation to the processing material.

Coarse 112 992 100

Medium 112 992 200

Fine 112 992 300

#### **PCD Sanding Disc**



Especially suited for the removal of coatings, bitumen and residue materials that normally clog up diamond discs.

112 965 401

#### **PCD Head disc**



With 6 PCD split buttons this disc is far more powerful than regular diamond discs.

112 992 400

#### Diamond grinding plate ECO



#### Rubber Velcro disc



112 999 200

# **CONCRETE GRINDER**

- For cutting & grinding of metal, ceramic, stone & concrete
- Supplied with 125mm grinding disc & grinding guard
- Includes 125mm dry cut diamond disc & cutting guard ideal for large format tiles
- Quick release lever on guards
- Spindle lock for easy disc change
- 3 position side handle
- Includes carry case for easy storage





Grinder 240V Order No. J-12550 Grinding Disc
Order No. J-12551

SITE DEMO AVAILABLE

#### **COLIBRI 2 Grinding Machine**

#### **SPECIAL** features

- light machine, only 35kg
- high performance of 2600 rpm
- high torque of 43 Nm
- easy tool change
- high surface performance
- foldable
- competitively priced

#### **TECHNICAL SPECIFICATIONS**

Mains Supply: 240v
Motor: 2200 watt
Working Width: 300mm
Speed: 2600rpm
Weight: 35kg
Extractor Connection: 50/76 mm

240V

112 979 700

110V

112 979 500





Change of grinding discs with quick release closure, no risk of losing spanners



Dust guard for dust free operation



Water level for setting of grinding disc, ensuring even grinding performance on any surface



Double-folding handle for easy transport of machine 10 m special cable for large working radius

#### Additional weight 10kg

For increased pressure and additional grinding performance

10kg weight

112 979 900

#### **COLIBRI DISC options**

#### Purchased separately to machine

New, improved grinding discs for Colibri machines. Reduces noise emissions during grinding by up to 15dB(A)

# PCD Disc Piranha - PINK LW

With strong grinding performance for tough adhesives, coatings or carpet residues.

112 979 810



# Universal Disc - GREEN LW

With very high and even grinding performance for cement underflooring and anhydrite floors.



#### 112 979 820

#### Special Disc -BLUE LW

With soft diamond binding for hard surfaces, mono concrete, hard floor etc.



#### 112 979 830

# Grinding Disc - Green ECO

Universal disc green with ECO quality.

112 979 670



# PCD Disc Baracuda - PINK LW

With support segments for coarsest applications, e.g. tile adhesive, very thick coatings, glue, paint etc.



#### (112 979 840)

# Universal Disc - BLUE ECO


Universal disc blue with ECO quality.



112 979 680

#### FLOOR GRINDING MACHINE KONDOR



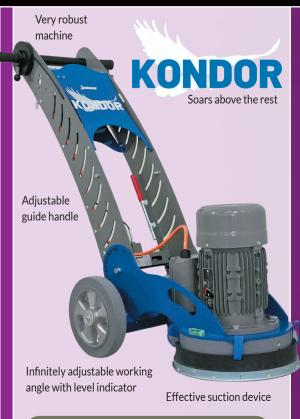

Very powerful, robust floor grinding machine for small to medium-sized areas for all subfloor preparation.

From the easy grinding of screed and other subfloors to the most aggressive use of PCD discs when removing filler, residues of covering or layers of adhesive the condor masters all challenges.

The KONDOR is characterized by ergonomic handling, a very effective grinding performance and TOP price-performance ratio, even with the grinding discs.

#### **Application**

- Removal of floor coverings
- Removal of adhesives and coatings
- Grinding and removal of screed, concrete and asphalt
- Leveling out irregularities

#### **TECHNICAL SPECIFICATIONS**

Power supply: 230V / 50Hz Motor power: 2.2kW

Dimensions LxWxH: 720x560x1170mm

Working width: 300mm
Speed: 1,450 rpm
Hose connection: 50/76 mm
Weight: 71kg



Transport position with a height of just 480mm

#### **GRINDING RINGS**

112 944 000

112 944 990

Newly developed disc holder system with tool-free changing of the grinding rings. Patent pending.

# Grinding ring PCD

Kondor - 230V

Kondor - 110V

For light/medium grinding & removal of adhesive/screed layers.



# Grinding ring PCD Duo

For medium/heavy grinding & removal of adhesive/screed layers.



# Grinding ring PCD Split Gold

112 944 650

For very aggressive removal of adhesives, coatings, paint etc.



#### Purchased separately to machine



# Grinding ring blue HB grit 30/40

Hard bond for soft, abrasive to medium-hard surfaces, e.g. screeds

〔**112** 944 620〕

# Grinding ring green MB grit 30/40

Medium bond for medium to hard surfaces, e.g. concrete



(112 944 630

#### **SANDING MACHINE - BS 330 RS**

# 1 machine - 2 applications as surface and edge grinding machine

The BS-330 is a robust grinding machine, which finds its application in both, surface and edge treatment.

The powerful motor generates enormous grinding performance on small and medium surfaces.

In addition, the machine can be converted without tools and in seconds to a perfectly matched edging machine.

Our proven, high-quality diamond grinding tools can be used with this machine.



The grinding head can be adjusted with a clever locking system in both directions.

So, both the right and the left side of the machine, can be used for edge treatment, simplifying grinding close to the wall enormously.

Complete with QUICK CHANGE base plate (without segments) & extension cable 10m (32') (see below)



**BS-330** 

SITE DEMO

**AVAILABLE** 

#### **TECHNICAL SPECIFICATIONS**

 Power supply
 110V

 Motor power
 1100 W (1,5 hp)

 Working width
 330 mm (13")

 Speed
 150 - 400 rpm

 Weight
 71 kg (157 lbs)

110V

**(112 986 300)** 

#### **Quick Change Base Plate**

Machine supplied with: Accessories Ø 330mm (13") for BS-330

QUICK CHANGE Base Plate can be used with 3 or 6 QUICK CHANGE segments



112 986 815

#### **Diamond Segments bought separately**

Download our Product overview and Application Recommendations chart by scanning the code.







#### **QUICK - CHANGE segments**

# **PCD** 4-trapezoid



112 380 240

#### **DUO** 2x PCD, 2x bar



112 380 060

# PCD head segment



112 380 020

#### Trapezoid Grit 14/18



112 380 077

#### **Trapezoid** Grit 30/40



112 380 070

For segment application recommendation please see MAIN Catalogue pages 32-33

#### **MASTER MOBIL HYDRAULIC III**



MASTER MOBIL III - 110V

#### Impact Design - Lightweight - Great Manoeuvrability

The powerful motor combined with the revised HYDRAULIC-DIRECT-DRIVE system ensures high output with an extremely low noise level.

#### The MASTER-MOBILIII is

self-propelled (forward and reverse) with unparalleled perfomance due to its high torque German designed electric motor.

Adjustable guide handle in six positions allows ergonomic operation depending on body size or preferred working position.

Weights can be easily removed for transportation, reducing the netweight of the machine.

#### **TECHNICAL SPECIFICATIONS**

Power supply 230V or 120V

Motor power 0.75 kW (1 HP)

Weight 75kg (174lbs)

Weight incl. front weight 105kg (205lbs)

#### **Additional Weight**

Fast and easy mounting 27kg (59.5lbs)



Weight for MASTER MOBILE

[111 801 420]

#### **Blade #101**

Self-scoring blade for vinyl, carpet, linoleum, cork and other floors.



152 x 102 x 1.6mm (6 x 4 x 0.062") 111 800 101

#### Blade #102

111 802 500

Small for hard to remove surfaces eg. epoxy, parquet, tough coatings.



152 x 127 x 1.6mm (6 x 5 x 0.062") 111 700 102

#### **Blade #103**

Ultra high quality spring steel for long blade life between sharpening. Works for all glued down floors.



<sup>7</sup> 254 x 76 x 1.6mm (10 x 3 x 0.062") 111 800 103

#### Blade #104

Especially for linoleum.



152 x 102 x 1.6mm (6 x 4 x 0.062")

111 800 104

See main catalogue for complete range of blades

#### **STRATO-MOBIL IV**

Angle of the handle is adjustable to six different positions in order to match the individual height of the operator or preferred working position.

Hydraulic driven turning handle control with adjustable comfort grips for easier operation. Increased power through modified hydraulic technology.

Adjustable blade holder which allows adjustment of the angle of the blade according to the removal conditions in order to ensure best possible removal rates.

#### Proven benefits:

- Extremely quiet operation.
- Easy release side weights on the side of the machine to allow a perfect weight balance according to the job condition.
- Rounded front weight which ensures the removed materials slide away smoothly without impeding the machine's forward movement.



# **STRIPPERS**



• Heavy duty 3 HP - original Flex motor 2000 watt

• Lightweight and compact for removal of all types of floor covering from concrete or wood floors.

#### Improved features:

- infinite height-adjustable guiding handle with vibration absorber.
- New blade deflector for improved material deflection.

• Includes height-adjustable wheel-set.

 All spares stocked in the U.K. = a fast turnaround in-house service/repair facility.

Comes complete with adjustable long handle, spare blades and blade protector, and serrated blade.

#### TECHNICAL SPECIFICATIONS

 Power Supply:
 120V or 240V

 Motor Power:
 2000Watt (3HP)

 Working width:
 210mm (8 ¾")

 Weight:
 14.4kg (31.8lbs)

#### **Power Stripper**

240V

111 089 750

#### **Power Stripper**

120V

111 083 750

#### **Optional Extras**

#### **Metal Carry Case**

111 090 200

height Adjustable Wheel Set (for retro fit to older versions)

111 095 900

T - Handle Section

111 095 079

#### POWER STRIPPER BLADES (also suitable for DURO-Stripper)

#### 60mm Blade



210 x 60 x 1mm (8 ½ x 2 ½ x 1 ½")

(111 080 001)

#### 130mm Blade



210 x 130 x 1mm (8 ½ x 5 ½ x 1 ½") 111 080 002

#### Serrated Blade HD

- Removes floor coverings with felt/fleece backing
- Serrated edge cuts off fibres
- Teflon coating keeps adhesive away from blade



210 x 60 x 1mm (8 ½ x 2 ½ x 1 ½") 111 095 400

#### COSMO IV Stripper

**Cosmo** - a powerful floor stripper for small and medium sized areas.

- quiet in operation
- adjustable handle
- guide handle can be folded for compact transport
- 750 watt motor, 45kg weight



240V 111 840 000 110V 111 840 800

Cosmo Spare Blade, 230mm wide

230mm

(111 800 107

Spare Blades for Turbo Stripper

5 Notch

350 x 120 x 1.0mm

111 600 003

350 x 120 x 1.5mm 111 600 001

# **STRIPPERS**



# **SCRAPERS**



# **SCRAPERS**



blade clamp

• 30cm Scraper c/w snap off blades

139 195 000

139 194 000

#### TAJIMA - Uni Scraper Japanese H.D Scrapers Adjustable optional flexible blade Stainless steel blades Hammer head for stubborn removal jobs Comfortable 'Soft grip' handle 139 192 000 Tajima 28cm Supplied with Tajima 56cm 139 193 000 angled rigid blade Rigid blade x4 139 192 010 Flexible blade x4 139 192 020

#### **Scraper Safety Covers**

- Prevents injury and makes reaching into your tool box safer.
- Also prevents blade breakage and damage to other items.
- Securely held in place by two straps with snap fasteners.
- Riveted leather construction





No. 4 - Scraper Cover

Fits all 4" scraper blades

4-SCG

No. 5 - Scraper Cover

Fits all 5" scraper blades

5-SCG







# **CLAWS & GRINDERS**



The original SILVER CLAW. The only claw with a lifetime guar-

Distinguished by an attractive ergonomic design and made from an almost indestructible aluminium alloy, this pulling claw is an indispensable and unexpectedly powerful aid in the removal of glued down floor-coverings. Clamping action gives a vice-like grip on material to be moved. This device protects the fingertips and nails.

Silver Claw

**111 107 000** 





#### **Rectangular Grind Stone**

Carbide and resin are the basic materials used in these stones. Holes in the underside provide sharp edges to assist the grinding action.

Grit 24

161 505 000



#### Round Rubbing Brick 6"

This small rubbing brick, at 6" diam (150mm) is handy tool for rubbing down stubborn spots/ marks on concrete subfloor, grit 20

**Rubbing Brick** 161 505 533



# METALLIC HAND GRINDERS







#### **Hand Sander HR**

Steel plate with scattered hard metal, grit 24 For sanding behind heating pipes

With back fin for sanding between radiator pipes  $365 \times 60 \times 40 \text{mm} \left( \frac{3}{16} \times 2 \frac{3}{8} \times 1 \frac{1}{2} \right)$ 





#### **COLLOMIX - Hand Held Mixers**



#### Collomix Xo-Series

The Xo machines are attractive to look at due to their revolutionary design. High quality components and materials ensure long-term safe use.

#### Hand Mixer - Xo1-R-HF

Compact 1-speed machine for a wide range of mixing jobs with a capacity of up to 40 litres.

Very easy to use, featuring the very latest ergonomic design. Excellent gearbox ratio and electronic speed control.

#### **TECHNICAL SPECIFICATIONS**

230V Power Supply Motor Power 1150W Gears 640rpm Speed 40 litres Mixing volume Weight 5.3kg

> Xo1 - 230V 111 243 000

Xo1 - 120V 111 243 500



Particular advantages over previous models:

- improved ergonomic handles
- very stable and robust handle construction
- very long life carbon brushes
- significant noise reduction

All Xo-mixers are equipped with the HEXAFIX clutch.

#### Hand Mixer - Xo4-R-HF

Very powerful, 2-speed mixer for universal mixing jobs with excellent ergonomics.

High torques provide sufficient power and speed even for high viscosity material; ideal quantity per mix - 65 litres.

#### **TECHNICAL SPECIFICATIONS**

230V Power Supply Motor Power 1500W Gears

Speed

1. Gear 420rpm 2. Gear 590rpm 60 litres Mixing volume Weight 6.3kg

Xo4 - 230V

111 244 000

Xo4 - 120V

111 244 500



#### Hand Mixer Xo55 DUO-HF

Easy operation and less effort through counter-rotating mixing tools

Forced-action mixing effect.

For mixing all types of materials, including viscous and heavy materials, quickly and thoroughly.

Electronic speed control. Variable speed for smooth power transmission

#### **TECHNICAL SPECIFICATIONS**

230V or 110V Power Supply Motor 1650w No. of gears Speed (no load) 0-450rpm 90 litres Mixing Volume Weight 8.8kg

#### Xo55 DUO options

230V Xo55 DUO 111 245 000 120V Xo55 DUO 111 245 800

#### Cordless Xo20



- Powerful 18v 5.2Ah battery
- · Ideal working height
- Reliable precision gearbox
- Safety swith with acceleration function
- Powerful drive motor
- Hexafix, quick change coupling
- 40 litre mixing capacity

#### **BATTERY INCLUDED**

#### **TECHNICAL SPECIFICATIONS**

18 V, 5.2 Ah Li-ion Power Supply Load speed -640rpm Mixing Paddle Ø120mm Max. mix quantity 40L

Charging time Approx. 100min

Xo20 Cordless

111 201 500

**Spare Battery** 

111 201 510

# **STIRRING**

#### **SMART - STIRRING STATION**

Uniquely adjustable and apply up to 100kg of screed in one operation!

Weight - 18.5kg

- Suitable for most stirring machines
- The solid front wheels in combination with the castor wheel allows ideal handling
- Unique 100L mixing capacity option
- Easily moved on site
- Robust construction for long life
- Manufactured to exacting standards by Janser
- Delivered complete with 50L mixing bucket!

**SMART Stirring station** 111 215 000



Adjustable in height for optimising fixation of the bucket and depth adjustment of the stirrer.

Adjustable to hold 50 or 100 Litre bucket.

# PROFESSIONAL STIRRING STATION Mix and apply up to 75kg of screed in one operation!



The solid construction of the trolley base guarantees a stable and secure stirring. The handle is easily adjusted in height giving you the best possible working position. It can effortlessly be turned or even removed completely when you need to put a stirring station back in your car. The tripod is quickly and without difficulty attached to the edge of the barrel. Its robust construction makes it keep even the most powerful stirring machines steady.

**Trolley Base** 

111 214 400

Turbo Stirrer

111 214 200

Mixing Barrel - 75L

111 214 300

Hose Holder

262 362 000

**Drill Support** 

111 214 100

#### Trolley (Tiltable)

Simplifies application of adhesive and levelling compounds.

for 30L bucket (without bucket)

111 215 500



111 217 000

Trolley base, Tripod Stirrer, 75L Barrel, Hose Holder (stirring machine not included)

#### **R1600 STIRRING MACHINE**

111 214 000

A new machine concept offering outstanding benefits:

• Variable speed electronics

Kit Complete

- Locking switch for permanent operation
- robust 2-speed gear with high motor
- Ideal for mixing volumes up to 40L (i.e. levelling compound, tile glue, ready-mixed mortars, plasters, etc.)
- · Ergonomic double handle design
- professional stirrer with extension adapter
- Suitable for the stirring stations PROFI and SMART

Stirring Machine

111 242 000



Stirring Machine

# **STIRRING**

#### **CLEVER II - STIRRING STATION**



Complete with special stirrer and mixing bucket 85L



Pouring position

Clever II 230V

Order No. 111 253 000



# **ECONOMY POWER MIXERS**

- Lightweight for comfortable handling and carrying
- Adjustable speed control
- Lockable speed control for continuous operation
- Metal handle acts as a rest when placing down protecting the mixer head
- Easy change brushes for increased motor life and easier servicing (available separately)

#### **TECHNICAL SPECIFICATIONS**

Power Supply 230V / 50Hz
Motor 850w
No. of gears 1
Speed (no load) 0-550rpm

 MIX850
 MIX850IND

 230V/50Hz
 110V/50Hz

 850w
 850w

 1
 1

0-550rpm



#### 850W Power Mixer

Economy Power Mixer 230V
Economy Power Mixer 110V

MIX 850 MIX 850 110

- Specially designed powerful motors
- 2 Gears for high performance
- Electronically controlled variable speed
- Lockable speed control for continuous operation
- Supplied in storage case

#### TECHNICAL SPECIFICATIONS

 MIX1400
 MIX1400IND

 Power Supply
 230V / 50Hz
 110V / 50Hz

 Motor
 1400w
 1400w

 No. of gears
 2
 2

 Speed (no load)
 300-700rpm
 300-700rpm

 Mixing Paddle
 Ø140mm
 Ø140mm



#### 1400W Power Mixer - Twin Gear

1400W Mixer - 230V MIX 1400 1400W Mixer - 110V MIX 1400 110

#### **LEVELLING PINS**

#### Save time and costs when levelling floors







- 100 90 80 70 60 40 40
- NO MORE GUESSING!
  - Now you can level with precision, achieve better results and use less material.
- Thanks to the integrated millimetre scale, the poles can be cut to the desired height.
- The strong adhesive tape ensures they can be fixed to all surfaces.
- The yellow pins are easily identifiable.

100 pieces 161 855 500

#### "Shoe-In" Slip On Shoes



Shoes are made from high quality, long lasting Elastomer.

Height of nails: 21mm - delivered as a pair

Optional flat studs available (e.g. for damp proof membrane)

M for shoe size L for 42 (8) and smaller 42 (8

L for shoe size 42 (8) - 44 (10) 171 805 600 XL for shoe size 44 (10) - 48 (15) 171 805 700

#### **Spiked Soles**



Complete with fixing straps.
Solvent resistant threaded steel spikes for walking on fresh screed and adhesives. Prevents disturbance to laid surface.

Long spikes 2" 171 805 000 Short spikes 1" 171 805 100

#### Adapters for mixing tools

Paddle connecting types

HEXAFIX® for changing tools - fast, no additional tools needed.

Adapter for upgrading hand held stirring tools with M14 thread to HEXAFIX®

need to screw the adapter onto the M14 thread of

Combi-adapter for upgrading hand held stirring machines with HEXAFIX® to M14 thread. Screw the combi-adapter onto

the 5/8 thread of the hand held stirring machine instead of the HEXAFIX® coupling.

Combi Adapter 111 233 200 **HEXAFIX®** 

M14 Screw-in **Threaded Metric** 

S - Standard



#### Overview of mixing

**MK** 

filler etc

MM

KR

DLX

#### Paddles by Collomix - for the perfect mix



Rugged professional mixing tool with three mixing blades. clockwise rotating, for heavy viscous materials such as concrete, mortar, plaster, epoxy mortar, etc.

туре	load	Ø	Length	chuck	type	in watts	Order Code
MK 120 HF	15-25kg	120mm	590mm	16mm	HEXAFIX®	900	161 605 900
MK 140 HF	25-40kg	135mm	590mm	16mm	HEXAFIX®	1000	161 616 900
MK 120	15-25kg	120mm	590mm		M14	900	161 604 000
MK 140	25-40kg	135mm	590mm		M14	1000	161 616 000



**WK** Versatile mixing tool with good material guidance, clockwise rotating, with two mixing blades for lower loading of the drive, for sticky and plastic materials such as tile cement, ready-mixed mortar, ready-mixed plaster, screed

WK 90 S	7-10kg	90mm	400mm	10mm	Push-in	500	161 606 000
WK 120 S	10-15kg	120mm	590mm	13mm	Push-in	700	161 607 000
WK 120 HF	10-15kg	120mm	590mm	16mm	HEXAFIX®	900	161 608 900
WK 140 HF	15-30kg	135mm	590mm	16mm	HEXAFIX®	1000	161 615 900
WK120	10-15kg	120mm	590mm	16mm	M14	900	161 608 000
WK 140	15-30kg	135mm	590mm	16mm	M14	1000	161 615 000



Mixing tool for small volumes of tile cement, ready-mixed mortar and pointing mortar; ideal for power drill, clockwise rotating.

MM85S	7-10kg	85mm	400mm	10mm	Push-in	500	161 611 000
MM 115 S	10-15kg	105mm	590mm	13mm	Push-in	700	161 612 000
MM 115	10-15kg	105mm	590mm		M14	750	161 613 000



Mixing tool with high shear forces, prevents the formation of lumps, ideal for self-levelling materials, adhesives and sealants, bitumen coverings, fillers and epoxy mixes;

KR 90 S	5-15kg	90mm	590mm	13mm	Push-in	750	161 620 000
KR 120 S	15-25kg	120mm	590mm	13mm	Push-in	900	161 621 000
KR 120 HF	15-25kg	120mm	590mm	16mm	HEXAFIX®	900	161 623 900
KR 120	15-25kg	120mm	590mm	16mm	M14	900	161 623 000



Levelling screeds, slurry paint, epoxy fillers and fibrous materials. High shear forces.

DLX 152	40-65kg	Ø152mm	590mm	16mm	HEXAFIX®	1200	161 625 900
DLX 152	40-65kg	Ø152mm	590mm	16mm	M14	1200	161 625 000

#### Basket Stirrer M14 Ø 120

Maximum efficient stirring 161 627 300

#### Mixing Whisk - cake style



#### **Universal Paddle Stirring Part HD**

A mixing paddle for everything! Fast clean 100% consistency. Angular for 540mm standard drills. Zinc plated steel, 10mm shaft diameter, basket diameter 125mm.



100 x 580mm 120 x 735mm

**Economy Stirrer** 

#### **PAJARITO Mini Stirrer**

50mm Ø - Ideal for small tins



# STIRRING







# For bridging cracks & grooves in screed

SUB FLOOR REPAIR

**Corrugated Connector** 

50m (55yds) roll 161 240 000 200m (297yds) roll 161 245 000

70 x 6mm ( 2 1/32" x 15/64") 161 212 100

**Dust Antler** 

111 286 100

## AQIX - COLLOMIX

#### Water dosing device AQIX Small helper with great effects!

Mixing the right consistency of mortar, fillers, levelling compounds screed, etc.

#### **TECHNICAL SPECIFICATIONS**

Preselected dosing quantities

in 0.1 increments: 0.3 - 991 40 L/min at 6 bar Flow rate: Operation pressure: 2 - 6 bar ± 0.05L Accuracy:

(Deviation at 0.3 - 10L)

Battery (incl.): 2x AA Water connection on device: 3/4" Weight: 688g (1.5 lbs)

> Comes in a sturdy hard shell case, 1/2" connector and 2 x AA batteries.

> > **AQIX Collomix**

Precise

- Battery operated so no obtrusive cable

• 2 memory buttons Breakproof housing

#### **Water Doser**

#### 50% faster dispersion - 100% accuracy!

Connect the battery-operated water dosing device effortlessly to your water hose and enter the desired amount of water via the display.

The device switches off automatically as soon as the entered amount has been reached.

> Easy attachment to almost every bucket



**Optional Accessory** 

3m hose and connectors

111 246 100

#### **Heavy Duty Mixing Tubs**



Mix 2 bags of screed

111 208 905



111 246 000

Mix 3 bags of screed

75L 111 208 915



111 208 920

Heavy Gauge Plastic for rigidity. Suitable for most compounds such as mortar, epoxy etc.

- Use with most mixing stations.
- Side Handles for ease of use.

#### Mixing Bucket HD



#### **GORILLA - YELLOW TUBS**



# SUBFLOOR PREPARATION

#### **POLYPLAN Spiked Aeration Roller**

With splash guard and telescopic handle.

Aids air-flow and aerates smoothing compounds. Available in 12mm and 31mm spikes.







12mm (1/16") short spike 31mm (1 ¾16") long spike 171 802 000 171 808 000

75cm (30") wide 12mm (1/16") short spike

31mm (1 <sup>3</sup>/<sub>16</sub>") long spike

171 803 000 171 809 000

#### **METAL SPIKED Aeration Roller**

With splash guard 18mm metal spikes

Fine metal spikes for perfect mark free finish due to very fine spikes (0.4mm).

Virtually self-cleaning, supplied with protective roller cone and long handle.



25cm wide 171 830 025 50cm wide 171 830 050

#### **Aeration Roller Cleaning Trough**

Great for cleaning rollers 25, 50, 75cm wide.

Roller not included. See above.



#### **JANSER PORCUPINE**

#### CLEANING SYSTEM

Due to the 15 side-mounted brushes in the bucket, the patented stirrer and tool cleaner saves a lot of time when cleaning stirrers, spiked ventilation rollers, trowels and much more.



Fill the cleaning bucket with water so the upper ring of bristles is about 1-2 cm covered with water. Insert the tool to be cleaned vertically and with slow, circular stirring movements until a sufficient cleaning effect has been achieved.



#### **Specification**

Dimensions ØxH: 40×43 cm

Filling volume:

For stirrers up to max. Ø 220 mm

# Outside bucket 30L with splash

protection lid inner bucket 30L with bristles.

111 288 000

#### **Spare Accessories**

Replacement bristles 3 pcs

111 288 010

# SUBFLOOR PREPARATION

# Adjustable to set desired height of screed. This 24" wide levelling tool features adjustable pins, complete with wooden handle – easy, accurate levelling from a standing position.

#### Features:

- Aluminium frame and stainless steel blades
- Stainless steel pins
- Adjustable 1-20mm
- Suitable for epoxy coatings, latex pumped screed and self-levellers
- Replaceable pin-bar
- Complete with wooden handle

Janser pin leveller 161 850 500







#### Screed Level Measuring Wedge

For measuring unevenness and readable from above.

With measuring units between 1-20mm ( $\frac{1}{32}$  -  $\frac{3}{4}$ ")

Measures lowest point between two support points of the straight edge.



161 800 000

# **CAM RAKE**

# Take screed application to another level

The Cam Rake allows the user to achieve screed application to precise and even depth throughout the spreading process, no matter what angle the rake is held at. When one point of cam is worn simply rotate to next cam point.

#### THE CORRECT ONE!

1 = 1.6mm = ½6"

1 = 3.0mm =  $\frac{1}{8}$ "

1 = 5.0mm = 3/16"

1 = 6.0mm =  $\frac{1}{4}$ "

1 = 8.0mm = 5/16"

#### **CAM RAKE 24"**

With wooden handle

161 850 550

Spare set of cams

161 850 551

Spare set of cams





161 850 551

#### HAND HELD - CAM RAKE 10"

#### Cams included

With fixed handle.

Great for confined areas whilst retaining precision of larger rake.

Hand held cam rake

161 850 552

Spare cams

161 850 551



# iTOOLS - by Janser

# Screed and Adhesive **Upright Trowels**

This complete upright trowel system allows for quick and efficient application of all types of screeds and adhesives.

iTOOLS upright screed and adhesive trowel kit is ergonomically adjustable, allowing for a correct working posture.

#### Advantages:

iTOOLS upright screed and adhesive trowel kit gives you the following advantages...

- Much faster spread of screeds and adhesives
- Ergonomically correct posture, facilitating the workload
- The unique, groove-free design of the blade holder makes it easier to clean
- It is possible to use the trowel while standing and without making "whirls"
- The tools are durable and will last many years due to high quality workmanship and materials

Why kneel when you can stand? This system is seriously fast! Adhesive fumes kept at a distance at arms length

#### Adhesive Trowel Kit

(without insert)

28cm inserts required see page 21



28cm (11")

Replacement notch holder For adhesive trowel

28cm (11")

262 361 600





#### **Screed Trowel Kit** (complete with insert) R1

Kit complete with telescopic handle.

Kit - 56cm (23 ½")

262 361 700

R1 Insert 10 pieces R2 Insert 10 pieces 262 345 800 262 345 900

#### Pin Leveller

For application of thick layers of screed with fibres.



262 361 430

Pins - Set of 2 pieces


262 361 450

#### **SUBFLOOR HARDNESS TESTER**

The slotted template is held on the floor with one hand.

Using the other hand, the point of the hardness tester is positioned in the slot and the body pressed to the template surface against the adjustable spring resistance.

The tester is then drawn along



Complete with pouch and scoring template

Hardness tester

110 140 000

#### **AQUAFOX Tap Adapter**



Especially suited for work with levelling compound or fillers when the measuring bucket doesn't fit under the tap.

Fits almost all single-lever mixers and bath tub fittings!

Complete with hose adapter and 1m length of hose.

**Tap Adapter** 111 214 111



# TROWELS - SCREED/SMOOTHING

























# **TROWELS**











161 784 000



# **ADHESIVE SPREADERS**

With wooden handle & fixed blade. For all notch style options see our main catalogue.
























# **TROWELS**

# for use with notched inserts



With wooden handle.



Use inserts - see page 28

18cm (7") 262 310 000

#### Thriftline Trowel - 21cm (8 ½ ")

With wooden handle.



21cm (8 ½ ") 262 311 000

#### Thriftline Trowel - 28cm (11")

With wooden handle.



28cm (11") 262 312 000

#### For inserts for all trowels see page 28

#### Spread Trowel - 28cm (11")

Without insert.

Traditional handle of lacquered wood. Spring steel blade.



Uses 28cm notched inserts

Spread Trowel - 28cm (11") 262 340 000

#### Fan Trowel - 28cm (11")

With insert

Shaped plastic handle for comfortable grip. Spring steel blade without rivets.



Use 28cm inserts

Fan Trowel - 18cm (7") Fan Trowel - 28cm (11") 262 310 300 262 312 300 X

#### Coloquick Spreaders

Spreaders with comfortable rolled grip. Made of aluminium for use with interchangeable inserts.



Use inserts - see page 28

Coloquick - 18cm (7") Coloquick - 28cm (11") 262 331 000 ( 262 331 100

## BIG AREA TROWELS - 560mm (22")

#### for self levelling compounds

560mm



With handle and with notch profile R2

Hardened and polished spring steel blade and blade clamp. Metal pole socket.

Use 2 x 28cm or 1 x 56cm blade.

560mm Big Area Trowel 161760000



With handle and with notch profile R2

2 adjustable stainless steel levelling pins for precise application. Includes R2 insert.

560mm with pins 161 762 000

#### **Inserts for Big Area Trowels**



Notch depth mm 3.0 Notch width mm 4.0 Tooth width mm 1.5



Notch depth mm 5.0 Notch width mm Tooth width mm



262 345 700 28cm (11") 10 pieces 56cm (22") 10 pieces 262 345 900

Notch depth mm 5.0 Notch width mm Tooth width mm



262 346 500 28cm (11") 10 pieces 56cm (22") 10 pieces 262 346 600

262 345 000 28cm (11") 10 pieces 56cm (22") 10 pieces 262 345 800

# SUBFLOOR & SURFACE TREATMENT

Notch depth mm Notch width mm Tooth width mm Notch angle °

Inserts now supplied in solid plastic sleeves for safety & protection.

# Insert profiles to actual scale

Notch Profiles Double-sided no			Drawings at actual scale	18cm (7") 10 pieces	21cm (8 1/4") 10 pieces	28cm (11") 10 pieces
A1 No	otch depth mm otch width mm oth width mm otch angle	1.1 1.5 0.5 55°		262 316 000	262 320 000	262 324 000
A2 No	otch depth mm otch width mm oth width mm otch angle	1.4 1.7 1.3 55°		262 315 000	262 319 000	262 323 000
A3 No	otch depth mm otch width mm oth width mm otch angle	1.5 1.6 0.4 45°		262 330 000	262 334 000	262 337 000
A4 No	otch depth mm otch width mm oth width mm otch angle	0.75 1.1 0.4 55°		262 332 000	262 335 000	262 338 000
A5 No	otch depth mm otch width mm oth width mm otch angle	1.0 1.35 1.45 55°		262 333 000	262 336 000	262 339 000
B1 No	otch depth mm otch width mm oth width mm otch angle	2.0 6.0 2.6 55°		262 314 000	262 318 000	262 322 000
B2 No	otch depth mm otch width mm oth width mm otch angle	2.55 3.0 2.0 55°		262 313 000	262 317 000	262 321 000
B3 No	otch depth mm otch width mm oth width mm otch angle	3.25 3.7 3.3 55°		262 326 000	262 327 000	262 328 000
B5 No	otch depth mm otch width mm oth width mm otch angle	5.15 5.7 14.3 55°		262 325 000	262 325 200	262 325 300
B6 No	otch depth mm otch width mm oth width mm otch angle	3.6 4.1 4.9 55°		262 326 700	262 327 700	262 328 900
B11 No	otch depth mm otch width mm oth width mm otch angle	5.0 6.1 7.9 60°		262 326 600	262 327 600	262 328 600
B15 No	otch depth mm otch width mm oth width mm otch angle	6.3 5.6 6.9 45°		262 326 900	262 327 900	262 328 990
SZ No	otch depth mm otch width mm oth width mm otch angle	6.0 5.0 5.0 45°		262 326 400	262 327 400	262 328 400
PA No Too	otch depth mm otch width mm oth width mm otch angle	5.0 6.0 5.0 60°		262 326 500	262 327 500	262 328 500
S1 No	otch depth mm otch width mm oth width mm otch angle	2.55 1.8 0.1 30°		262 326 200	262 327 200	262 328 200
S2 No	otch depth mm otch width mm oth width mm otch angle	3.35 4.2 0.1 60°		262 326 300	262 327 300	262 328 300
S4 No	otch depth mm otch width mm oth width mm otch angle	5.05 10.3 0.1 90°		262 326 100	262 327 100	262 328 100
					28cm (11") 10 pieces	56cm (22") 10 pieces
R 1 No	otch depth mm otch width mm oth width mm	3.0 4.0 1.5			262 345 000	262 345 800
R') No	otch depth mm otch width mm oth width mm	5.0 4.0 2.0			262 345 700	262 345 900
R 3 No	otch depth mm otch width mm oth width mm	5.0 6.0 2.4			262 346 500	262 346 600

# TROWELS - SCREED/SMOOTHING

# VERSABLADE® Trowel System

#### **Trowel Red Handle 682-TH**



This plastic moulded handle has a 3.8cm (1 ½") round red cushion grip with large ribs around the length of the grip.

Red Handle

682-TH

Comfortable solid rubber grip handle is made of easy to clean solvent resistant plastic. The handle securely fastens to the blade by simply aligning the slotted openings of the handle with the steel button projections of the blade and tapping trowel edges on the floor until tight and the front button is covered. To remove blade, simply tap trowel on opposite end.

Handles and Blades sold separately.

#### Trowel Open Handle 682-TH

Made of moulded aluminium and plastic, this sturdy open-end handle has the same feel of a fixed handle trowel.

Open Handle

684-TH

**Trowel Blue Handle 682-TH** 



This plastic moulded handle is  $3cm (1 \frac{1}{4})$  wide with a flattened top and sides, has a smooth blue cushion grip and is excellent for use in toe space areas.

Blue Handle

683-TH

#### **VERSABLADE® Trowel Blades**

U.S. Patent 7.331.081 B2

7,694,380 B 8.151,404 B



Medium notch blade

FCA-1

notch 1.5mm x 0.8mm

Fine notch blade

FFA-1

Produced from premium quality full tempered bright polished spring steel for a long lasting edge. Blades are flexible and measure 11.5 x 29cm (4 ½ x 11 ½")

Blades notched on all four sides

Other notched profiles available.



Flat trowel for screeds

PC-1

notch 2.5mm x 2.5mm

Deep notch blade

RCA-1

#### **SPECIAL TROWELS**

#### **Swimming Pool Trowel**

Two rounded edges for core finishing work and mark free trowelling. Short shank for flexibility.



36cm (14")

SP14BS

#### Mini Trowel - Soft Grip



20cm (8")

967 556

#### **Economy Trowel - Soft Grip**



28cm (11")

373 507

#### INDUSTRIAL ELECTRIC FAN HEATER

This great new tough, steel heater is ideal for heating up rooms to a fitting temperature, drying out screed, warming up sheet materials and carpet.

- Fan only, plus high and low heat settings with adjustable thermostatic control
- Thermal cut-out overheat protection
- Insulated handles for safe handles

#### **TECHNICAL SPECIFICATIONS**

Power supply 230V 16A Max Output 3kW

Dimensions 302 x 334 x 390mm Weight 5.6kg

)mm

3 Phase Models with greater output (up to 30kW) also available



3kW Devil

IFHD-1

3kW Devil 110 volt

IFHD-110

# **HYGROMETERS & MOISTURE MEASURES**

#### **PROTIMETER - Mini Indicator**

- General purpose moisture meter for building surveying, timber inspection and a range of other applications.
- Moisture probe 'cal check' and wood calibration table.
- LED display and carry case.
- Range 6 90% WME.
- Simple button operation.
- Colour coded scale shows moisture level at a glance Green/Dry - Yellow/Risk - Red/Wet.

Mini Protimeter DIGITAL BLD 5702



#### **PROTIMETER - Aquant Indicator**

- Radio frequency measures relative moisture to nominal depth of 10-20mm.
- Non-destructive no pins, no drilling.
- Ideal for checking concrete, plaster, masonry and fibreglass.
- Digital display that is synchronised with a colour coded LED scale Green/Dry - Yellow/Risk - Red/Wet.
- Simple to use, by holding against surface to be measured.
- Scale 0-1000 Depth 10-20mm Weight 150g.

Aquant 2 **BLD 5765** 

#### **PROTIMETER - Surveymaster**

- Dual-function combining two pin inspection method (**measure** mode) for surface dampness with a non-destructive radio frequency technique (search mode) for below surface dampness.
- Range 70-999 relative (non invasive)

DRY (GREEN) - 70-169 AT RISK (YELLOW) - 170-199 WET (RED) - 200-999

Non Invasive reading to 19mm, with Pins to 12mm

Surveymaster

**BLD 5365** 

#### **PROTIMETER - HYGROMASTER 2**

- Large LCD display at touch of button.
- RH. ambient & dewpoint temperature.
- Hygrosticks can be used to measure the equilibrium RH value in floors & walls.
- May be used as optional surface temperature probe.
- Supplied in case with one **HYGROSTICK**.

Hygromaster with Hygrostick Hygromaster with Quickstick

**BLD 7750 BLD 7751** 



#### **Optional Accessories**

#### **Humidity Sleeves with caps**

For use with MMS or Hygromaster - Measures equilibrium RH value (20 Per Packet). Pack of Sleeves **BLD 4902** 

#### **Humidity Box**

Use with MMS or Hygromaster to measure surface %RH in solid floors. Insert hygrostick into side hole plug.

**Humidity Box** 

**BLD 4711** 

#### Hygrostick



- Replacement hygrostick for MMS/Hygromaster
- Range 30-100% RH

1 Stick

BLD 4750

#### Quickstick



- Replacement quickstick for MMS/Hygromaster
- Range 1-100% RH for air quality application

POL 8750

#### **Certified Hygrostick**



For MMS/Hygromaster with 3 point calibration certificate.

1 Certified Stick **BLD 4750B** 

# **HYGROMETERS & MOISTURE MEASURES**

#### **PROTIMETER - MMS3**



#### 2023 Model MMS3 from PROTIMETER

The complete moisture measurement and diagnosis system for building environments. The very latest Protimeter technology in one 4 in 1 system - search, measure, humidity, surface temperature.

- Instant readings at push of button
- Continuously logs if left on site
- Diagnose the extent of moisture intrusion
- Monitor drying out
- Use deep-wall pin type probes to measure wall moisture, subfloor & surfaces
- Non-destructive and pinless radio frequency measures 19mm below surface
- Measure RH and temperature dewpoint and surface temperature
- Detects mould or fungus growth.

MMS3 Basic - to include:

- Heavy duty moisture probe
- **POL 8751 BLD 5060**
- Manual

**Quickstick Short** 

**Pre-formed Protective Case** 

**Basic Survey Kit** BLD-9800



#### MMS2 Survey Kit - to include:

- Quickstick Short
- **POL 8751**
- Hygrostick
- **POL 4750** BLD 5802
- · Hygrostick extension lead Heavy duty moisture probe
- **BLD 5060**
- Cable
- Pre formed Protective Case

Complete Survey Kit

BLD-9800-S

#### **Optional Accessories**

#### Hygrostick Extension Lead

• Optional extra Hygromaster



#### Hammer Electrode

- Measures sub-surface moisture levels in wood
- Use with Mini MMS & Surveymaster



**BLD 5000** 

#### **Deep Wall Probes**

- Measure moisture at depth in walls
- Use with Mini MMS & Surveymaster



# **HYGROMETERS & MOISTURE METERS**

#### Moisture Indicator - CAISSON V1-D1 (Aucon)



The installer's favourite instant readout meter Features:

- Designed particularly for concrete, but can also be used on wood
- Non-destructive (no damage to surface or material) with measuring sensor located under the meter
- Immediate digital reading up to 3cm depth
- Complete with carrying case
- Battery operated simply place on surface to measure

CAISSON V1-D1 with case

110 410 000

#### **Hydrometer GM-200**

The GM-200 Hydrometer is used to measure the moisture content of concrete, plaster, cement and EPS.

Display adjustable in CM-percentage, ideal for comparison measurements with CM method.

Complete with carry case.



Hydrometer GM-200

110 133 000

# **HYGROMETERS & MOISTURE MEASURES**

#### Moisture Indicator VI-D4

Non-destructive method of accurately determining moisture content in concrete and cement without using pins.

Sensor type: spring pins, screen memory

7 available scales: Concrete (0-6% H2O) Cement screed (0-6% H2O) Cement screed (0-4% CM) Anhydrite screed (0-3.5% H2O) Anhydrite screed (0-1.9% CM) Caisson scale (0.3-15.3m) Relative scale (0-100%)

The measured value can be called up by pressing the tester lightly

The test device works on the principle of capacitive stray field measurement and allows testing of the moisture conditions in the near-surface region.

Complete with carrying case

With DIN-7 connection for

This method of moisture determination is both quick and easy without any need to drill holes or leave damage. Using a pinless moisture meter is becoming the industry standard due to the ease of use over the older style moisture meters using pins.

With the VI-D4 pinless moisture meter, the sensors are positioned on the back of the moisture meter, allowing the user to use the device to measure moisture in very tight spaces and also being able to view the LCD display at all times.

#### Accessories

For connection to V1-D4 with DIN-7 plug compatible with GANN (UNI 2, HB 30, RTU 600)

#### Air Sensor RFT-38C

For the determination of temperature and humidity

Air sensor

110 411 500



#### Bullet Probe B-60

For the non-destructive detection of building moisture

Bullet probe

110 411 600





#### **Hydromette Compact -BL-**

110 411 000

Electronic moisture meter used for different kinds of wood as well as for soft building materials and insulating materials.

The pins are pressed into the respective material and enable a precise measurement of the moisture content in sawn timber, chipboard, veneer and fibreboard materials up to a maximum thickness of 25 mm as well as normal gypsum or mixed plasters. After measurement the minimum and maximum values can be accessed in the memory storage depending on the building material.

#### Measuring range

Wood: 6 - 25 % moisture content Building materials: 0.4 - 6.0 % of dry weight

Fully equipped with battery, extra pins, protective cap and plastic box.

Hydromette -BL-

110 223 000

#### **Hydromette Compact B2 -BL**

Electronic building moisture indicator using the high-frequency (dielectric constant) measuring principle.

Features 3-line LCD and versatile ball sensor for the non-destructive detection of moisture in all types of building materials. Also suitable for checking the dispersion of moisture in walls, ceilings and floors. An ideal pre-tester for use with all CM devices.

Measuring range 0 to 199,9 digits (scanning range) 0,3 to 6,0% by weight 0,3 to 4,0 CM%

fully equipped with battery and plastic box

Hygrometer B2-BL



#### **TRAMEX CMEX 5**





110 376 500

#### Moisture Meter CMEX 5

The new improved version of the well-established and trusted CMEX2 - moisture meter,

#### Non-destructive measurement in seconds

The CMEX5 is a non destructive meter for measuring moisture content instantly in concrete floors and slabs. Incorporating an optional plug-in port for a pin type wood probe and an RH Hygro-i2, relative humidity probe - this is an ideal all round instrument for flooring professionals.

CMEX5 detects and evaluates the moisture conditions within the slab or screed by non-destructively measuring the electrical impedance.

A low frequency electronic signal is transmitted into the material under test via the electrodes in the base of the instrument.

The strength of this signal varies in proportion to the amount of moisture present in the material.





Hygrohood

110 376 500

Hygro Probe

CMEX 5

#### **GREEN BOX**

Original Green Box blades - ice hardened 0.65mm (0.025") thick, grade 1 A quality in plastic dispenser for environmental protection.

Cutting edge quality exclusive to

# inser

Pack of 5 dispenser, each contains 20 blades = 100 blades



Straight HD blades 60mm (2 3/8")

262 038 500

Hooked blades

262 036 500

Deep Hooked Blades

262 037 500

0000 Straight / hooked blades


The ultimate in blades

**CONTRACTORS FAVOURITE!** 

Concave blades

262 039 500 262 034 500





100 blades in 10s in a strong plastic box. Sheffield made quality.









#### **STANLEY Blades** - original Sheffield made

100 blades in 10s in a strong plastic box.



#### **MOZART Premium Blades**

HD x100 262 001 500 Hook x100 262 003 500



Concave x100 262 005 500 Deep Hook x100 262 004 500

#### TITAN-COATED GREEN BOX BLADES

The Titan coating ensures a considerably longer life of the blade. You will also have to change the blade less often, which saves time.

- The Green-Box System is considered the quickest blade-change-system.
- Ice-hardened steel from Sweden, titan-coated, 3-angular-sharpened, in reliable environmental-friendly dispenser.

#### Pack of 5 dispensers

Dispensers contain 20 blades = 100 blades.

Titan Blades, straight

262 035 300

Titan Blades, hooked

262 036 300

Titan Blades, deep hooked

262 037 300

Titan Blades, concave 262 039 300



#### **SPECIAL BLADES**

Araseur



Slotted USA Style



100 Box 262 048 500 Hi-Tech



262 259 101

**Economy Deep Hook** 



100 Box

# TRIMMING / SAFETY KNIVES



### TRIMMING / SAFETY KNIVES


















**STANLEY®** Knives









Fixed Blade - Utility knife





### TRIMMING / SAFETY KNIVES

















Lino Knife









### **PERFECT CUTTER**

Speciality installation tool that enables perfect edge-cutting of floor coverings

Perfect cutter including 10 hooked and straight snap-off blades

Perfect cutter

262 020 900

H.D. blades 10 pieces Hook blades 10 pieces

262 020 100 262 023 100

- Cuts perfectly around curves, posts and irregular walls
- Works great on carpet, vinyl and sisal
- Special installation tool that ensures the perfect edge cutting of floor covering
- Trims flush along walls Unique design allows for a comfortable firm grip, added pressure and better control, which makes the cutter safer to use
- Easily adjusts for various pile heights Cuts with less effort because it cuts on a radius • Material being trimmed does not need to be creased • Smooth plastic base easily glides along wall • Durable steel construction • Uses snap-off blades
- Ten straight blades and ten hook blades included.

### **Base Edge Trimmer - ARASEUR**

Trims most floor coverings.

Base edge trimmer

262 259 000

Spare hooked blades 100 pieces

### Acrylic Seam Cutter

Seem cutter for cutting carpets, along the ridges. Also suitable for double cutting.

Due to the transparent casing, the cut seam remains visible.

**Acrylic Seam Cutter** 

262 254 600

Slotted Blades (100)

262 048 500

### Multi-purpose Wall Trimmer

Suitable for vinyl or carpet. Cuts material flush to skirtings.

Wall trimmer

Slotted Blade 100 pieces

262 048 500



### **Trim-Master Trimmer**

- Adjustable and reversible.
- Uses standard blades.
- Adjusts both angle and depth of cut.
- Use to trim carpet & vinyls

Trim-Master trimmer

262 259 200

### JUTE & WOVEN BACK CUTTERS

#### **Carpet Cutter**

For Jute back.

Carpet cutter Spare blades 100 pieces

262 250 000 262 110 000

### Jute Cutter - Metal

Nickel-plated steel with strong plastic handle.

Jute cutter - metal Spare blades 100 pieces 262 110 000

### Loop Pile Carpet Cutter

Efficiently cuts most loop pile carpet regardless of thickness. Unique two-blade design accommodates both left and right positions for cutting closer to the yarn edge.

> 262 250 500 262 048 500





### Carpet edge cutter 262 281 000 Spare blades - 10 pieces

discomfort and minimize rust.

accommodate varying pile height and

stainless steel construction eliminate

262 281 001

### **Loop Pile Cutter**

Carpet Edge Cutter - Conventional "Deluxe"

For textile backed carpet. With 2 blade design to cut as close to the yarn edge as possible by using either the left or the right blade. Cutter can be adjusted to the thickness of the carpet. Comes with guiding rail and 2 spare blades.

Loop pile cutter

04 05 05

Spare blades - 100 pieces

262 048 500





### **CUTTING DEVICES**



### **TAPICUT CUTTER - Nickel-plated**

For absolutely clean cuts on all sorts of soft floor covering - especially foam back Full instructions for use

Tapicut

262 251 000

Blades - 12 pieces 261 252 000



### Foam Back Cutter

Nickel-plated steel with strong plastic handle.

Cutter

Spare blades - 100 per box

768E



#### **Carpet Cutter**

For foam back, blade angled,.

Carpet cutter

262 254 000

Two-hole blades - 100 pieces

262 255 100

### **Cushion Back Cutter**

Nickel-plated steel with plastic handle. Slender guide keeps cutter in the rows.

Cutter

CBC-1

Spare blades - 100 per box

The installers favourite!



262 048 500

### **Cushion Back Cutter 301**

Cuts dense foam back. Bevelled guide keeps cutter in the rows. Nickel-plated.

Cutter

CRC-1

Spare blades - 100 per box

262 048 500

### **Cushion Lock Cutter 302**

- 30° angle cut
- Close cuts for great seams

Cutter

CRC-2

Spare blades - 100 per box

262 048 500

### **POWERED CUTTERS**

### **Electric Circular Cutter FORMAT 2**

Light and powerful all purpose floor covering cutter for textile floor coverings up to a thickness of 15mm (1/2"). Note: shown here with optional strip cutter attachment. 856 100 003

230V FORMAT - Complete with case

856 100 000

HSS 10-sided blade

856 100 004

### **Cordless Rotary Shear** (Battery)



Cuts most materials such as carpeting, linoleum, padding and heavy textiles.

Complete with battery and charger

**Rotary Shear** 

856 140 000

HSS 10-sided blade

856 100 004

### **SHEARS** Finest Solingen Steel





From the manufacturers of the famous **Wilkinson** brand (Est. 1760)






### **REPAIR TOOLS & SEWING**

Utilise remnants or carpet from a hidden area to repair burns, rips, tears and other small damage.






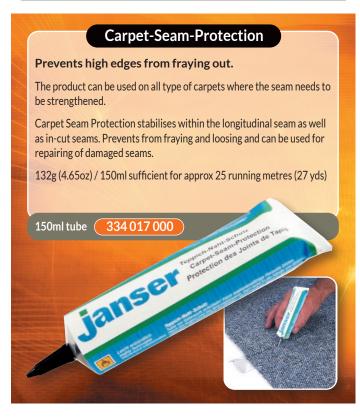















### **Grooving Machine KFU 830**



Very handy grooving machine for all synthetic materials, linoleum and vinyl. Copes perfectly with uneven floors and professional results are guaranteed. With adjustable lateral edge for non-slip safety pads.

223 920 800 120V

230V 223 920 000

**TECHNICAL SPECIFICATIONS** 

Power Supply 230V or 110V Input Circuit 830 Watt (1 HP) Revolutions 5,000 rpm Cutting Depth 0-5mm (0-3 1/6")

Weight approx

4.5kg (10 lbs)

Complete with metal carrying case & dust bag, HM-elliptical grooving blade Z12Ø130 x 3.8mm ( $5^{1/8}$ " x 3/16"), Xtool kit.

Diamond blade recommended for safety flooring.

It is recommended to connect a vacuum cleaner to the adaptor that is part of the machine.

**Spare Grooving Blades** for KFU 830

HM Blade Ø 130mm (5 1/8") 223 920 001

Diamond blade Ø 130mm (5 1/8") 223 920 002

**Spare Grooving Blades** for KFU 800

HM Blade Ø 130mm (5 1/8") Elliptical Z12

223 900 002

### Grooving Machine KFU 1000 E

The ultimate in grooving machines



- Reverse removal of chips.
- Infinitely variable revolutions (8,000 15,000 rpm).
- Large dust bag, easily removable for emptying.
- Infinitely variable cutting depth from 0-4.5mm (0-3/16")

230V 223 951 000

120V 223 951 800

**TECHNICAL SPECIFICATIONS** 

Power Supply 230V or 110V Input Circuit 900 Watt (1.21 HP) 8,000-15,000 rpm Revolutions

Cutting Depth 4.5mm

Weight approx 4.9kg (10.9 lbs)

**HM Grooving Blade** 

12 teeth, elliptical Ø 120 x 3.3 x 20mm (4 <sup>1</sup>/<sub>16</sub> x <sup>1</sup>/<sub>8</sub> x 1 <sup>3</sup>/<sub>16</sub>")

223 950 200

Ø 120 x 4.3 x 20mm (4 <sup>1</sup>/16 x <sup>3</sup>/16 x 1 <sup>3</sup>/16")

223 950 100

Complete with one elliptical grooving blade Ø120 x 3.3mm  $(4 \frac{1}{16}$  x  $\frac{1}{8}$ ) in carrying case. Dust bag.

#### **Extension Handle** for KFU 1000 E

With this handle, the KFU 1000 E can be guided along the seam. It enables operation in a comfortable, upright working position. Solid aluminium finish, with built-in cutting depth control on the upper handle.

223 951 200

**Diamond Grooving Blade** 

For safety floorings Ø 120 2.4 20mm (4 <sup>1</sup>/<sub>16</sub> x <sup>1</sup>/<sub>16</sub> x **1**<sup>3</sup>/<sub>16</sub>")

223 950 300

### **LEISTER Groover**

- Leister Groover Grooving Machine
- Perfect turbine technology dust extraction
- 3-point-support
- Adjustable roll for non-slip pads
- 2-level-speed control: 14.000 + 18000rpm

#### HM Grooving blades Ø 110mm (4")

Trapezoid	3.5mm	(3/16")	223 800 001
Semicircular	2.8mm	(½")	223 800 005
Semicircular	3.5mm	(3/16")	223 800 030
Semicircular	4.0mm	(3/16")	223 800 002

Diamond blade Ø 110mm (4")

Semicircular 3.5mm (3/16")

223 800 020



#### **LEISTER Groover Complete with:**

- carrying case
- trapezoid blade Ø 110 x 3.5mm (¾16")
- dust bag

223 870 800 120V 230V 223 870 000

#### **TECHNICAL SPECIFICATIONS**

230V or 120V Power Supply Input Circuit 700 Watt (1 HP) Weight ca. 6.5kg (14.4lbs) Adjustable 0 - 4mm (0 - 3/16") **Cutting Depth** 

### **GROOVING MACHINES**







• Ideal for medium and small sized floor areas

• Equipped with two height adjustable blades for uniform grooving of PVC or Linoleum

• One front blade to cut the surface and the rear blade to be used against the wall

**BEETLE Groover** 

## **BEETLE Groover**



Front blade 3.5mm

Rear blade 3.5mm

Front plate

Back plate

Roller guide set

### **SWIFT Groover**

The ergonomic grooving tool for fast, consistent and clean seam-cuts for PVC and linoleum.

Easy operation by perfect cutting angle. Blade can be adjusted in depth.

Complete with leather pouch.

262 611 400

(Spare Blade - Order No. 262 611 410)





### **Accuracy Ensured!**

The two guide pins in combination with the guide plate allow a stable and secure operation following the seam.

### **GROOVING TOOLS**

### Groover tool "GROOVY" by LEISTER



- Ideal for surfaces that are small and difficult to access
- Executing clean grooves up to connecting walls
- Precise and simple guidance thanks to integrated guide rollers

### **SWISS** PRECISION!

"Groovy"

Order No. 262-611-800

Spare Blades 3.5mm

Order No. 262-611-810

### Jantro Type Super Adjustable Groover III Specifically designed for safety flooring. Adjustable groover III 262 608 000

Spare blade - 1 piece

262 608 001



















### **HOT AIR WELD GUNS**

### **HOT JET-S** - the world's smallest hand tool



#### HOT JET WELD GUN

Gun 230V

**Gun 120V** 

Lightweight gun for repair work or welded joints and for welding in corners and confined areas. Great for walls and cap-cove welding.

- - Ideal on walls too

Lightweight

Low Noise

- · Great for corners and curves in confined areas and shower curves
- Integrated gun stand and Standard Nozzle supplied

Element 230V 224815001 Element 120V

### Kit complete with: Regular Nozzle LEISTER • Speed Nozzle Grooving Tool Spatula Guide Feed Roller Spatula Cleaning Brush • Carry Case.

#### **TECHNICAL SPECIFICATIONS**

HOT JET - S WELD KIT

**Power Supply** 230V or 110V **Heating Element** 435 W (0.6HP Temperature 20-600°C (68-112°F) Weight 0.56kg (1.23lbs)

**DIGITAL!** 

224 825 000 230V Kit 120V Kit 224 825 800

Element 230V 224815001 Element 120V 224815801

### LEISTER HOT AIR WELDING GUN TRIAC AT

Air volume can be adjusted independently from temperature. Intuitive handling with "e-drive" display. Temperature measurement probe guarantees a precise temperature.

224 815 000

224 815 800

Complete with carrying case With regular nozzle

224 823 000 230V 120V 224 823 800

• Set temperature reaches its level automatically

- Voltage fluctuations are compensated
- Precise temperature
- Independent air volume

#### **Heating Elements**

Element 230V 224 828 001 Element 120V 224 828 002



#### **TECHNICAL SPECIFICATIONS**

110V / 240V **Power Supply** Power 1600 W (2.14hp) Air flow 120-240L/min Temperature 40-700°C (104-1292°F) 1.0kg (2.2lbs) Weight

### TRIAC ST - The new S

- 100% Swiss made quality
- 60 years of experience in making hot-air tools brought together in the new TRIAC ST
- The sturdy, professional hot-air tool that weighs less than 1kg/2.18lbs
- Functional design: two-component handle grip and optimum centre of gravity ensure ergonomic working
- Quick clean air filters
- Automatic carbon stop (collector protection) and heating element protection



janser

### TRIAC ST - Weld Gun

### Includes:

- Weld gun
- Standard nozzle
- Carry case



230V Weld Gun 224 828 000

120V Weld Gun 224 828 800

- Includes: Weld gun
- Grooving tool
- Standard adaptor
- Speed-nozzle
- Roller
- Spatula
- Spatula guide/sledge
- Wire cleaning brush
- Plastic case



TRIAC ST - Welding Kit (9 items)

230V Welding Kit 224 828 050

120V Welding Kit 224 828 850

LEISTER

### **HOT AIR WELD GUNS**

### LEISTER 'Mozart' TRIAC ST - Welding Kit

#### Includes:

- Weld gun
- Grooving tool
- Standard adaptor
- Speed-nozzle
- Roller
- Mozart trimming knife
- Wire cleaning brush
- Plastic case





230V 'Mozart' Weld kit 224 822 500

120V 'Mozart' Weld kit 224 821 800

### **CASES** Plastic LEISTER Case Compartmentalised LEISTER Plastic case 224 819 100

### ALK 2/200 Plastic Welding Iron

Multi-purpose welding iron for connecting plastic floor covering etc.



**TECHNICAL SPECIFICATIONS** 

**Power Supply** 230V or 120V 200 W (0.3HP Heating Element 80x75mm (3<sup>3</sup>/<sub>16</sub> x 3")Weight approx. 4.2kg (9.3lbs)

**ALK 230V** 

226 600 000

### **SPARE HEATING ELEMENTS**

WELD GUN & VOLT	JANSER CODE	LEISTER CODE
TRIAC S, 240V	224 810 001	100.689
TRIAC S, 110V	224 810 007	100.702
TRIAC BT, 240V	224 821 001	136.916
TRIAC BT, 240V	224 821 801	136.918
HOT JET S, 240V	224 815 001	100.818
HOT JET S, 110V	224 815 801	103.607
TRIAC ST, 240V	224 828 001	142.717
TRIAC ST, 110V	224 828 002	142.718

# NEW) EASYFLOOR

### Precise hand welding thanks to device holder suitable for Leister TRIAC.

Manual joint welding in plastic PVC flooring, as well as natural flooring made of linoleum and rubber, becomes child's play with the help of the EASYFLOOR holder.

Thanks to the adjustable angle and precise guidance of the TRIAC hot air blower, users achieve constant welding zone preheating and increased weld quality during manual welding.

- Stable, precise hot air blower guide
- · Safe welding position when joint closing
- Easy closing of resilient floor coverings
- Fatigue-free manual joint welding
- · Holder for safe positioning of the hot air hand tool

### **Rubber Insert** Rubber insert Ø 64mm (2 1/2") for older TRIAC models

225 880 010



### **HOT AIR WELD GUNS - LEISTER**

### **WELD-PROBLUE**

### VINYL WELDER FOR FLOORLAYERS

### **WELD-PRO Gun**

#### Includes:

- Standard and Speed Nozzle
- Carry case



#### **TECHNICAL SPECIFICATIONS**

Voltage V-42 100 120 200 230 for 50/60 Hz

Power consumption W 960 1400 1600 1400 1600 Temperature °C 20 - 700, infinitely controlled

Air flow I/min max. 230

Air pressure 3000 (30 mbar) after about 24hr operation

Weight 1.3 with 3m cord Ø 100 x 330 (Handle Ø56) Size mm

### **WELD-PRO Guns**

230V Gun

224 838 000

120V Gun

224 838 900


### **Elements**

230V Element

224 838 001

120V Element 224 838 901

### **WELD-PRO Kit**



- Traditional design
- Solid Construction
- Economically priced

#### Includes:

- Case
- Standard & speed nozzles
- P-Groover
- Feed roller
- Spatula & spatula guide
- Cleaning brush

### **WELD-PRO Kits**

230V Kit

224 838 050

120V

224 838 950

### **Elements**

230V Element

224 838 001

120V Element

224 838 901

### **Automatic Drive Unit - MINIFLOOR**

### the new automatic welder for resilient floor coverings

The drive machine with integrated holder for your existing welding gun is the smart choice for floor professionals and beginners.

No tools needed to assemble detector.

Ideal for short joints or smaller and medium-sized projects.

Note: Adapter for TRIAC S required.

#### **TECHNICAL SPECIFICATIONS**

230V or 110V Power supply 0.5 - 5 m/min Driving speed Dimensions (LxWxH) 310 x 225 x 245mm

Weight 5.3kg


**WELD GUN NOT INCLUDED** 

Order No. 225 880 000



### **HOT AIR WELD GUNS - LEISTER**



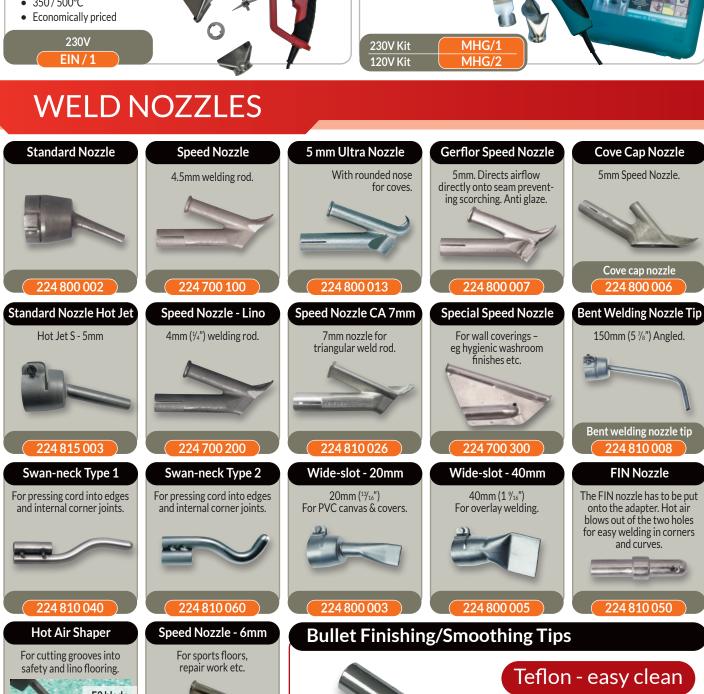







224 800 009

224 400 011



### These "Bullet Tip" finishing nozzles attach to the standard nozzle and are great for smoothing out welds, to give the perfect finish! They feature a Teflon coated tip so easy to clean in use/ after use. 3-piece set - sizes: 1/2" 1/4" 3/8" **WDD 660T**

### **ROLLERS**



### ROLLERS / PRESSING TOOLS

### Mini Cove Roller



40mm precision roller for cove fillets of 20mm

Order No. 224 400 700

### Lino-Cove Roller



43mm roller for fillets up to 32mm

Order No. 224 400 800

### **Edge Detailer**



6mm perfect edge and corner roller pressure application on vinyl / sheet / lvt's

### Cove Cap Roller



For cap and cove work with commercial vinyl

Order No. 224 400 900

#### **Cork Press**

Non-marking for pvc & lino 320 x 120 x 25mm (11 ¾" x 4 ¾" x 1")

With rounded corners

### **Cork Press**



With wooden handle

262 381 000

### **Pressing Hammer**

For smoothing down joins



**Pressing hammer** 

262 378 000

#### GLIDA - Dual Purpose

### TECHNICAL SPECIFICATIONS

Weight approx. 10kg (22lbs)

Handle length 120cm (3' 11 1/4")

Pressing width 38cm (1'3")

For use on resilient flooring simply cover roller with carpet.

Tighten carpet by turning wing nuts.

> GLIDA 262 406 000

### Lightweight Roller

- Working width 450mm (1' 5 3/4")
- Designed with 4 rollers, which float separately to accommodate uneven floors.
- Works on all carpet vinyl and wallpaper.
- Easy to carry, fits under "toe-kicks" without damage to cabinets.

Lightweight roller

262 401 000

Stair Tool with Roller



237 543 000

With detachable handle and galvanised rollers complete with protector caps\*

(\*only Pressure Rollers 30Kg)

### **Transport Wheels**



262 395 000 80Kg (176lbs)

### **TECHNICAL SPECIFICATIONS**

4 Parts

Weight ca. 80kg Roll Ø 160mm (4 ¾,") Total width 510cm (20")

262 400 000

### PRESSURE ROLLER

#### 30Kg (66lbs)

#### **TECHNICAL SPECIFICATIONS**

3 Parts

Weight 30kg (662lbs) Roll Ø 120mm (4 ¾4") Total width 310cm (12 1/4")

262 390 000

#### 50Kg (110lbs)

### **TECHNICAL SPECIFICATIONS**

4 Parts Weight

50kg (110lbs) Roll Ø 120mm (4 ¾,") Total width 510cm (20")

262 391 000

ORDERLINE 0121 561 5888

### TRIMMING TOOLS










262 623 000





Spare blade - 1 piece

262 609 310



Complete with 2 HSS-Blades

Spare blades - 2 (pair)





Trimming tool slim

262 609 300





### TRIMMING TOOLS

WDD 715

### **Hot-Tip Equipment**

Splice, Trim, Smooth & Repair



**WDD 715R** 



Trim inside corner welds Cut coving weld grooves Trim coving weld rod flush

Great when installing cove base in corners



Replacement green teflon blade for outside corners

WDD 71500





WDD 984C





**WDD 984E** 

WDD 984F

Locking nuts complete with blades

### **Bevelling Master**

 Precise edges in no time 45° bevel on all types of material.

Hot metal tool 120V

- Bevelling and cutting without interim assembly.
- Easy blade and adjustment

complete with 10 blades

262 244 700

Spare blades - 100 pieces

262 110 000



**TRI-CUT** 262 412 600 Seam cutters, edge cutters and strip cutters combined in one tool. Trapezoidal and hooked







for seams

blades can be used.

for strips (50-100mm)

for edges

### **PVC Edge Trimmer**

For achieving a 25 degree mitre at PVC tile edges and design coverings after cutting.

complete with 6 spare blades

659 100 000



Spare blades - 6 pieces

262 262 001

### **Lino Edge Trimmer**


For pre-cutting factory edges of linoleum

Standard - 12mm cut 262 415 000 Special - 25mm cut 262 415 500 Spare blades - 5 pieces 262 415 001



### **SEAM CUTTER - Vinyl / LVT**

Precise cutting of plastic floor coverings LVT, needle felt etc, providing seamless join. Cutting depth up to 10mm. Possible to cut two layers at once with 2 mounted blades to form a perfect match.



Seam cutter + 10 blades

262 101 000

Spare blades x 100 pieces

262 110 000

### LINOCUTTER

- Cutting depth and cutting width are infinitely adjustable
- Straight blades for scribing and hook blades for cutting of thin coverings
- Works with standard blade which saves a lot of cost and pays for the tool over time

Linocutter

262 412 500



### Selvage Trimmer



Trims the factory selvage so the sheet material can be precisely scribed and seamed. Insert the selvage in the slot and pull. V shaped blade for accuracy.

Selvage Trimmer Replacement Blade

C-340 C-340-1



### **Lino and PVC Strip Cutters**



For strip widths 0-11cm 262 246 500



For strip widths 3-20cm (13/16 - 8") 262 246 000



For strip widths 6-30cm (2 %-12") 262 247 300

#### **Spares**

Spare blades, large and small 5 pairs

262 247 100

Spare Web 262 246 002

Reversion set for blades 262 247 300

### LAYING AIDS for VINYL, PVC & LVT materials

### INSTALLATION KIT - for LVT design flooring



STARTER KIT

- DS333 Cutter
- 1x Bevell Master
- 1x Mitre Shear
- 1x Concave Blades (20 pcs)
- 1x HD Blade (20psc
- 1x Orange Knife in holster

For DS333 Cutter specification please see

PAGE 60




### **Wall Corner Template**

For precise cutting of inside and outside corners of PVC or linoleum installations. Ensures a perfect result on corners and edges of cove base.

Comes with left & right side template.

For 100mm (4") cove base height 262 148 000

For 60mm (2 1/8") cove base height (262 147 000)





### Wall Profile & Mitre Templates





Templates for wall profiles

262 144 000 50mm (2") Radius 262 145 000

Mitre-Template 45%90° For 60mm (2 1/8") cove base height

262 146 000

### **LVT Templates** Precision layout for guillotine or 257mm setting out work

222 448 555

### **Hole Cut Kit**

Set of two

Hole Cut Kit includes: 1 x Tool Handle

430mm

1 x 4-20mm Cutting Head (for standard LVT utting)

1 x 16-30mm Cutting Head (for thicker material and laminate)

Supplied in carry case

Hole cut kit

### LVT Hole Cutter


Perfect, handy tool for the tool box - cuts perfect round holes in design flooring - works with lyts, click vinyls and laminate!

Calibrated guide to cut to exact hole diameter required. When working with click/laminate flooring simply fit cutting head to your drill.

**Hole Cutter 4-20mm** 



• Waterproof - long lasting • No shrinking or peaking at seam joints • Virtually invisible • 2 year shelf life

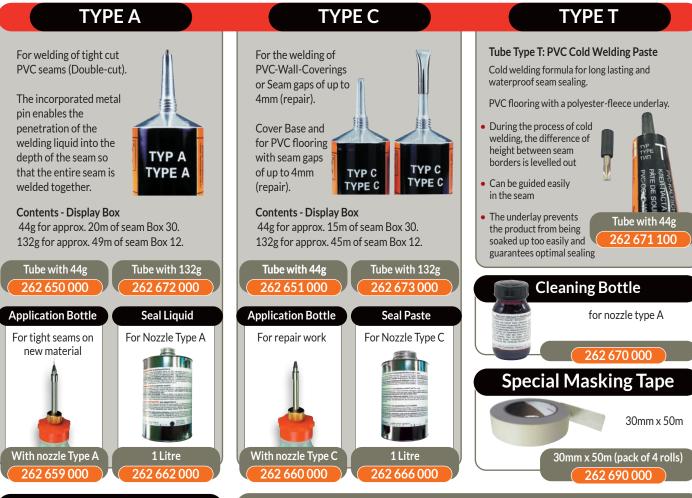







### **SCRIBERS**

#### **Short Scriber 401 Brass**

Scribing tools for hard flooring



Brass. For scribing when covering steps with nosing, maximum working range 56mm, for material thicknesses up to 8mm, overall length 100mm.

Short scriber
Spare needles - 25 pieces

401 262 132 002

#### Scriber with wooden handle Brass

Handle can be attached in three positions for horizontal and vertical scribing.



Same version as No. 401, but with three-way attaching 105mm long wooden handle, screws on both horizontally and vertically. Overall length, including horizontally screwed-on wooden handle 225mm.

Short scriber
Spare pins - 25 pieces

262 156 000 262 132 002

#### **Short Recess Sciber Brass**

Reverse scribers for hard flooring



Same version as No. 401, but with curved guide, overall length 110mm.

Reverse scriber 262 127 000 Spare needles - 25 pieces 262 132 002

### Seam Scriber with Handle



Seam scriber with handle 262 125 000 262 126 000

### **Double Scriber**

Especially for laying PVC stair edges.



 Double scriber
 262 128 000

 Spare pins - 20 pieces
 262 126 000

### Seam Scriber - Standard

Pins or blades can be used with this scriber.



 Seam scriber - standard
 262 139 900

 Pins & Blades - 5 of each
 262 139 901

### Short Seam Scriber (Armstrong)



Armstrong seam scriber 262 135 000
Spare pins - 5 pieces 262 126 002

### Stair Scriber

For marking the rear edge.



 Stair scriber
 262 129 000

 Spare pins - 20 pieces
 262 132 002

### **Wall Scriber**

With the use of a pencil, it enables you to trace along the wall. Ideal to lay PVC or linolium skirtings or finishing strips.
Length: 21cm

Max height: 20cm
Wall scriber
222 430 000

### **COMBINATION & BAR SCRIBERS**

### **Combination Bar Scriber - Cutting Scriber**



Long version with adjustable cutter blades holder.

Combination bar scriber 2

 Combination bar scriber
 262 132 000

 Spare blades - 6 pieces
 262 132 001

 Spare needles - 25 pieces
 262 132 002

### Combi Scriber - Short

Turning lower guide rail allows use as standard or recess scriber. Range of 385mm. Wheel passed over wall contour transfers to floor covering to depth of 410mm.



 Combi scriber - short
 262 130 000

 Spare blades - 5 pieces
 262 415 001

 Spare needles - 20 pieces
 262 126 000

#### Seam & Threshold Scriber

Handy seam scriber for seam and threshold work.



Seam & Threshold Scriber 262 124 000

Spare Pins (20) 262 126 000

#### **AIRWAY Scribers**

These tools feature the original famous Airway quality design and construction a heavy die cast housing, with a sturdy precision fitting plated steel bar.

The No. 11A Scriber has an extra needle hole in the housing to circle scribing and inlaying feature strips in a solid field. (Takes 21-N scriber needles)



6" Airway bar scriber

8" Airway bar scriber

### Wall Line Scriber

For transferring the wall line onto the flooring. Distance from the wall can be set from 2 - 35cm.

Wall line scriber
Spare pins- 20 pieces

262 139 000 262 137 000

### TRACER MARKING KITS - Pencils / Leads / Pens



Proscribe with deep hole pencil, 6x replacement lead holster and carry case

Multifunction scribe tool with deep hole construction pencil and leads for profile scribing, parallel marking and more.

> Proscribe 262 488 700



### Deep Hole Pencil for Flooring / Construction

All purpose deep hole construction pencil with fully extendable lead for marking up to 145mm (5.7") depth.



### Pack of Spare Leads (x6)

Replacement leads for TRACER deep hole construction pencil (4 x 25 graphite, 2 x yellow).



(262 488 000)

### Deep Hole Pencil Plus Pack of Leads

Complete deep hole construction marking kit including replacement leads (4 x 2B graphite, 2 x yellow).



262 488 100

### Double tipped marker pen with holster

Multi-purpose permanent construction marker pen with reversible double tip for marking up to 50mm (2") depth.

262 488 300



262 488 200

### **PICA Green Pen**

With replaceable speciality leads, marks and writes on all surfaces. Also suitable for dusty, raw, oily, wet and dark surfaces.

Green Pen Spare refills kit with 10 graphite leads

262 485 000 262 485 100

Spare refills kit with 8 special leads 4 x graphite leads

2 x coloured leads, yellow

Spare refills kit

# 2 x coloured leads, red 262 485 200

### **DIVIDERS**

### **Dividers - Straight Legs**

200mm. Available with or without pencil holder



8"/200mm with straight legs 262 152 000

### Pin Vice

With wooden handle. Wooden handle provides greater control for accuracy.



### **Dividers - Bent Leg Section**

150mm. Forged polished steel with one point slightly curved.



150mm with bent leg section 262 150 000

### Pin Vice - Metal

Excellent for freehand scoring.



Pin vice - metal 262 136 000

### Dividers - 4"

Fits in palm of user's hand, fixed bent leg and removable straight leg for pencil scribing.



Rickett Knife

Carbide tipped blade scores through surface ensuring clean break of material.

Rickett knife 262 026 000


Spare blade 262 026 001



### STRAIGHT EDGES / RULERS



### STRAIGHT EDGES / RULERS

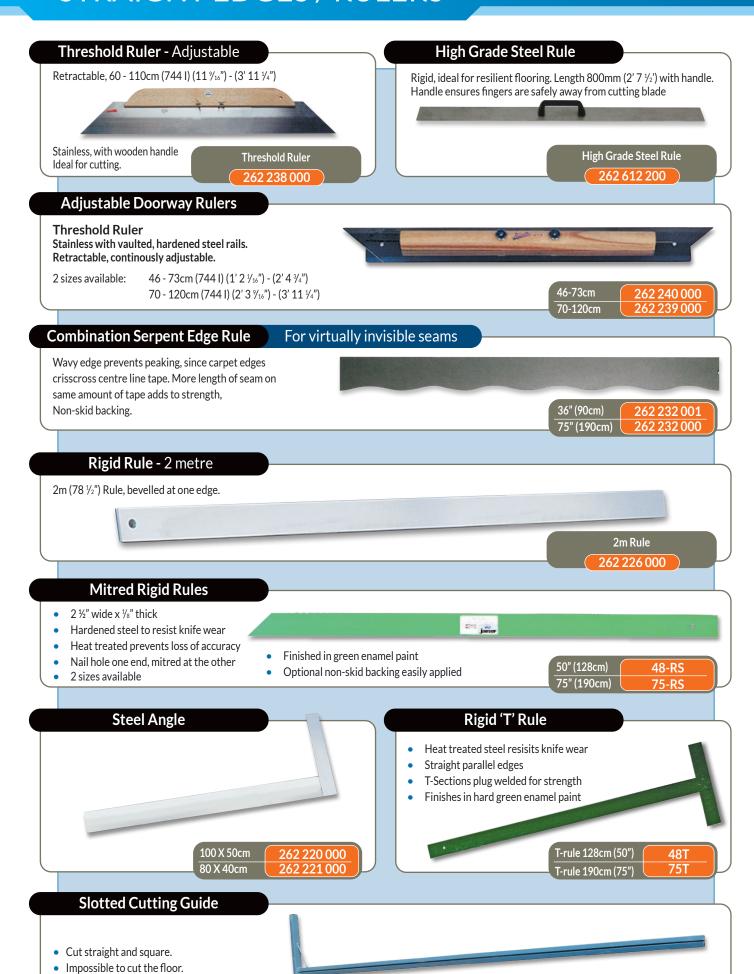

4m Guide Rail

5m Guide Rail

851044000

851045000

Rigid Rule with 'T' Piece.

### **FLOOR TILE CUTTERS**

### H76 ALL PURPOSE TILE CUTTERS - 12"

Cuts clean edges on all types of resilient floor tile - even solid vinyl tile, a material too tough for the other cutters. Also cuts asphalt (without preheating), vinyl composition, rubber, cork, linoleum, felt-backed vinyl, marble translucent vinyl and marble chip epoxy tiles. Expertly designed to give the trade the fastest, most convenient and the most durable cutter available.

#### Tile cutter with castors

H76

#### **TECHNICAL SPECIFICATIONS**

Capacity ¼" thick, 12 ¼" wide Weight 20lbs with castors

& gauge
Overall size 18"w x 18 ½"l x 8"h
Construction Steel & Aluminium

Steel & Aluminium alloy castings

#### REPLACEMENT PARTS

Upper blade	H-76-3
Lower blade	H-76-4
Castors (x3) + screws	H-76-5
Adjustable gauge	H-76-6



- 1 Lock nuts hold the thumb screws in position thereby preventing annoying and time consuming changes in the shear angle adjustment.
- 2 Tough tool steel blades, precision ground, specially heat treated and razor sharp - hand honed for best available cutting performance. Easily replaceable after years of service.
- Upper blade holding bar adjusts quickly to the proper shear angle and depth of cut for the various types of tiles. Easy to follow instructions packed with each cutter.
- 4 Only a minimum amount of motion required to operate this spring returned handle. Cutting line stays in full view.
- 5 Hand carrying hole is shaped and positioned for better balance and more comfort than other brands.
- Orecision diecast gauge for accurate 45 degree and 90 degree cuts. Can be adjusted in only seconds to the desired setting. Notch at rear acts as a wrench for the shear angle thumb screw lock nuts - another convenient exclusive Gundlach feature.
- Longer table features both an inch and a metric scale. Gauge can be set for all sizes of lateral cuts - from maximum to absolute minimum.
- 3 Located within each upright housing are graphite treated steel (not soft die cast metal) slide bearings. They provide for minimum wear and positive retention of blade alignment for easier and cleaner cutting of tough to cut solid vinyl tiles.
- 3 1" ball type castors are optionally available for smooth and easy moving on the job. Castors leave no marks and move instantly in any direction. Without castors the tile cutter rests on 3 raised and beveled spots that eliminate bumping and chipping of uneven tiles.
- Exclusive offset table design permits holding the tile throughout the entire cutting operation. Eliminates time loss and aggravation from picking up cut tile from a flat table with worn fingernails.

comes

with

2 guages

### H24 TILE CUTTER - 24"

### Makes precise cuts on large tiles with ease.

- Eliminates time consuming utility knife cuts and gives a perfectly straight and square edge.
- Use on rubber, vinyl composition or solid vinyl tile for straight cuts on 18", 50cm or 24" tile, or up to full diagonal cuts on 12" tile.
- Equipped with two adjustable gauges, one for 45° and 90° cuts and the other for 90° cuts only.
- Dual measuring scale graduated every 1/8" and 1cm.
- Equipped with 4 ball type castors for ease of movement.
- Long wearing alloy steel blades precision ground for accuracy.

#### **REPLACEMENT PARTS**

Upper blade	262 249 501
Lower blade	262 249 502
Castors (x4) + screws	H-24-5
Adjustable	
combination	
straight/45°gauge	H-2445
(for 12" diagonal	
half cuts)	
Adjustable straight	H-2490
galige 9 1/4"	

H24 Tile cutter

262 249 500

#### **TECHNICAL SPECIFICATIONS**

Capacity  $\frac{1}{4}$ " thick, 12  $\frac{1}{16}$ " wide Weight 57  $\frac{1}{2}$  lbs with castors & gauge

Overall size 29"w x 27 ¼"l x 8 ½"h Construction Steel & Aluminium alloy castings PVC Edge Trimmer

For the production of a 25 degree mitre at PVC edges.

With 6 blades 659 100 000 262 262 001

Lino Edge Trimmer

To precut factory edge of linoleum.

Twin blades cut sheet from both sides. 12mm cutting depth

Edge trimmer 262 415 000

262 415 001

5 spare blades

### **CUTTING GUILLOTINES**

### **Design Cutters**

### **Design Cutter DS-333** 222 445 550



Cuts all kinds of design coverings fast, accurate, quiet, dust-free and without electrical connection. Suitable for LVT, Cork, Carpet Tiles, CV, Rubber.

**NEW**: with improved stop and extendable table

#### **TECHNICAL DATA**

Cutting width 330mm (13")
Max. material thickness 6mm (1/4")
Cutting angle 0-45°

Cutting angle  $0-45^{\circ}$ Size (LxWxH)  $620 \times 430 \times 20$ 


 $620 \times 430 \times 200$ mm  $(34^{3}/_{8} \times 16^{7}/_{8} \times ^{7}/_{8}")$ 

Weight 7.0kg (15.5lbs)

Spare bade for DS-330/DS-333

222 446 001

### **Design Cutter DS-241** 222 420 000

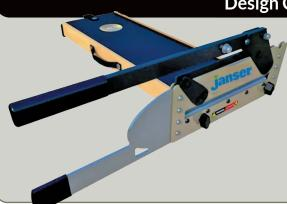

The DS-241 cuts planks up to a width of 24cm and a material thickness of up to 12mm

Easy transport to the construction site in the integrated transport case (Cutting table = transport case)

#### TECHNICAL DATA

Cutting width 241mm (9  $\frac{1}{2}$ ") Max. material thickness 12mm ( $\frac{1}{2}$ ") Table/Case (LxWxH) 600 x 50 x 220

600 x 50 x 220mm (23 <sup>5</sup>/<sub>8</sub> x 1 <sup>15</sup>/<sub>16</sub> x 8 <sup>11</sup>/<sub>16</sub>")

Cutter (LxWxH) 555 x 25 x 200mm

(21 <sup>7</sup>/<sub>8</sub> × 1 × 7 <sup>7</sup>/<sub>8</sub>") 6.3kg (13.9lbs)

Spare Blade for DS-241

Weight

222 420 010

### **BULLET Shears**

- Dust-free and quiet work with precise cut!
- Cutting guillotines for design flooring (LVT), rubber
- Max. Material thickness 14mm

### **BULLET shear 33cm**



#### **TECHNICAL DATA**

Cutting length max. 330 mm (13")Cutting height max.  $14 \text{mm} (\%_{16}")$ Weight 9.4 kg (20.7 lbs)

BULLET shear 33cm 222 449 300

Spare blade for BULLET shear 33cm

222 449 301

### BULLET shear 50cm



#### **TECHNICAL DATA**

Cutting length max. 500mm (9 11/16")
Cutting height max. 14mm (1/16")
Weight 12.8kg

BULLET shear 50cm

222 449 500

Spare blade for BULLET shear 50cm

222 449 501

### **BULLET shear 66cm**



### TECHNICAL DATA

Cutting length max. 660mm (26")
Cutting height max. 14mm (%")
Weight 16.1kg

BULLET shear 66cm

222 449 600

Spare blade for BULLET shear 66cm

222 449 601


### **CUTTING GUILLOTINES**

### **MAGNUM Cutting Guillotines**

Quality top class guillotine cutters for cutting laminate, wood, plastic and rubber flooring, object-carpet tiles, cork etc

Cut fast with little effort, precise, free of dust and noise. **Cut without splintering** and chipping.

Perfect for cutting laminate flooring, pre-finished parquet, design flooring such as Amtico, Scala, PVC, cork tiles etc





#### **TECHNICAL DATA**

Cutting length max. 330mm (13") Cutting height max. 25mm (1") 15.7kg (34.6lbs)

The MAGNUM Edge 33 cutter comes assembled and is ready for immediate use.

Integrated LED light strip.

Spare blade I-series (with hole)

222 421 001

### MAGNUM Edge 50cm 222 422 000



#### **TECHNICAL DATA**

Cutting length max. 500mm (19 11/16") Cutting height max. 25mm (1") Weight 19kg (42lbs)

Spare blade I-series (with hole)

# Optional accessories Universal angle with parallel guide

Transport Rollers for Magnum I-Series 222 425 020 222 421 005

### **MAGNUM Cutting Guillotine - RCT Series**

222 423 000



#### **TECHNICAL DATA**

Cutting length max. 760mm (29") Cutting height max. 25mm (1") Weight 19kg (42lbs)

Great for cutting wider "soft tile" products up to 1 metre.

Lightweight and easy-to-handle, with smooth rollers for transporting on the

Includes wall template, angle guide and precision ruler for precise cutting jobs.

Spare blade RCT-series

222 423 001

### **MEASURING TOOLS**

### LEICA DISTO™ D110 750 701



The smallest laser distance reader in the world



Measuring distance - Measuring from an edge

TECHNICAL SPECIFICATIONS

Typical measuring accuracy

Range

0.5 - 60m (197')

Dimensions

120 x 37 x 23mm

Weight

Protected against spray water and dust

IP54

Press a button to measure distances, calculate square areas and volumes fast - easy and precise.

- Small & handy
- Bluetooth smart
- Free app for smart phone or tablet
- Time delay release
- Stake out function
- Metric & feet and inches

### LEICA DISTO™ D2

DISTO-D2

The laser distance meter with many talents Precise even over obstacles!





Staking out equal or different distances - Measuring inclinations

Measure exact distances and determine every angle fast and accurately.

- Addition/subtraction
- Area/volume
- Pythagoras function
- Bluetooth smart
- Automatic end piece
- Case and batteries

### TECHNICAL SPECIFICATIONS

Typical measuring accuracy

**Range** 0.05 - 100m (328')

Memory

Illuminated Display yes

Protected against spray water and dust

### LEICA DISTO™ X3

The laser meter with robust muti-functionality. Measure exact distances & angles fast!

- Indirect height measurement
- Smart area, volume giving ceiling, wall & floor areas
- Min / Max measurements
- Timer function 1-60 sec for delayed measurements
- Multifunctional end piece
- 4-line illuminated display
- Recall of last 20 measurements

#### **TECHNICAL SPECIFICATIONS**

Accuracy + 1mm 0.05 - 150m Range Measuring range tilt sensor Dimensions 122 x 55 x 31mm Weight 155g Protected against spray IP54 water and dust



**DISTO-X3** 

### LEICA DISTO™ D1

Handy, pocket sized device – perfect for domestic measuring!

Range - 40 metres

**Ultimate accuracy** and a great price!



DISTO-D1

#### Cloth Fibron Tape



10m/33ft 262 418 200 262 418 300 50m/164ft 262 474 005

### 8m & 10m HD Tapes



Your logo on this item! Please ask for details

HD tapes in ABS case 20% thicker blade for a longer blade extension before 'break' is reached. Double rivetted for extra strength. (Metric & imperial)

10m ATM4

# Neon



5m/16ft 262 483 000 8m/26ft 262 484 000

#### Powerlock



3.5m	262 470 000
5m	262 471 000
8m	262 472 000
10m	262 472 001

#### Powerblade Tape

Powerblade -Komelon, 8m

- Extra wide and high-viz blade Double sided printing
- Push-button return Magnetic, dual-end hook

J-PB/8

### **Metal Chalk Line**

30m (98' 5") metal 262 420 000

### **Plastic Chalk Line**

30m (98' 5") plastic

Plastic chalk line **262** 420 100

### **Chalk Line Refill** 230g (8oz)



White Red 262 421 004 Blue 262 422 000

### **KICKERS & STRETCHERS**

### 412 Deluxe Extendable Kicker

The installer's favourite - easily adjustable.



JANSER - now with extra thick buffer as standard!

Janser 412 Deluxe	237 412 000
Buffer pad standard	237 412 001
Buffer pad extra wide	237 412 008
Pin plate assembly	237 412 002
Nap grip set of 3	237 412 003

#### 214 - Chrome Finish

Classic Roberts design - easily adjustable.



214 Deluxe - Chrome	237 405 000
Buffer pad standard	41209
Buffer pad extra wide	41204
Nap grip set of 3	41203

### **CRAIN 605 Extendable Kicker**

Finger contours on handle. Extra thick buffer.



CRIAN 605	CR-DK
Buffer pad	237 412 009
Pin plate assembly	237 412 106
Nap grip insert	237 412 107

#### Roberts 214- All Black model



All Black Model 237 405 500

### GT-2000



GT-2000 Chrome GT-2000

GT-GENERAL + Gel buffer GT-2100

Buffer pad GT-2000-B
Pin plate GT-2000-P
Nap grip inserts GT-2000-N

### 422 Extendable Knee Kicker



422 Deluxe Knee Kicker 422

Buffer pad extra wide Pin plate assembly 237 412 002 Nap grip insert 237 412 003

### **STAIR CLAW**

Hook the claw on the stair tread and pull down-pulling action stretches the carpet across the stair – bottom edge tucks carpet under.



#### **Carpet Spreader**

For stretching onto tackless trims.

Notched Spreader C-485

Unotched Spreader C-486



### **POWER STRETCHERS**

#### **POWER STRETCHER**

Adjustable pin depth. Wide tail block has non-marking rubber pad and glides in any direction.

#### Operating length:

- Min. 87.6cm (34 ½") max. 6.7m (22') Extra tubes can be added. Metal case supplied.
- Weight 27.6kg (62lbs)
- Lifetime guarantee on tubes

Power Stretcher Extra Steel Tube 3'



Double Headed Stretcher
Handy tool with clean lines,

serves both as a tubeless stretcher and a seam closing tool especially useful for matching up patterns. Complete in case.

Angle converts for tubeless power stretching.

Double headed stretcher

237 440 000

### Power-Lok Stretcher (Swivel Head)



- Lightweight aluminium tubes
- Low profile swivel head
- Locking handle avoids tube adjustment
- Variable pin penetration for different carpet thicknesses
- Complete with four tubes and one anti-lock tube
- Stretch up to 7m (23ft)
- Additional tubes available 1.5m (5ft)

Power-Lok Stretcher

237 410 000

### **OPTIONAL EXTRA**


### Carpet Stretcher Hook

Stretch from wood subfloors.
Prong pierces through
carpet underlay
into wood
subfloor.


Carpet stretcher hook

DSH-2

### **STAIR TOOLS**

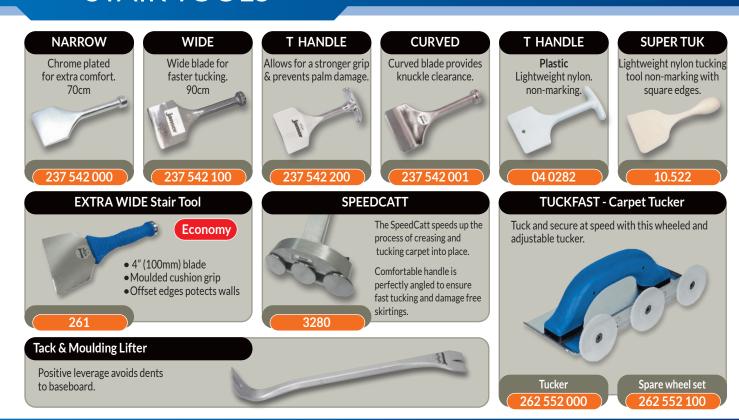

### **HAMMERS - MALLETS - DRIVE BARS**

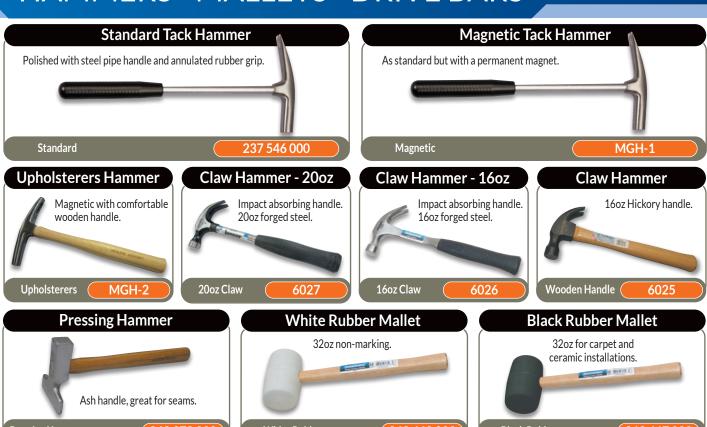





### **KNEE PROTECTORS**

### **Original Softie**

Black/Blue



Softie knee pads

161 123 000

### Original Softie - Large size

Black/Blue

Softie knee pads - large 161 123 900

### **Original Softie - GOLD & BLACK**



Softie knee pads

161 124 500

### **SOFTIE RANGE**

#### The ultimate for comfort

Dual stitched re-inforced polyurethane coating for long life and comfort. These knee pads are made of 100% washable neoprene and have an extra large super-soft contoured 3/4" thick foam rubber insert pad for greater comfort. The front of this knee pad will not mark or scratch floors. Quick and easy on/off. Single 3" wide front fastening velcro® strap. Non binding straps fit below the knee and prevent chafing, allowing these knee pads to be worn with shorts.

#### **Leather Softie**

Extra large - heavy duty. Brown leather.



Leather knee pads

161 124 000



### Original Softie - HI-VIS GREEN



Super Soft, Super Comfortable!

Softie knee pads - large (161 125 500

#### **Blue Jean Softie**

Wide back strap - no bunching!



Blue Jean Softie

161 123 950

### 'Camo' Softie - Large



Camouflage large Softie 161 125 900

#### KICKER Kneepad

- Cushioned top panel which impacts with carpet kicker buffer
- Super comfortable neoprene straps
- Lightweight yet robust to cope with carpet fitters prolonged use

Kicker kneepad

161 126 000

### PROLINE GEL™ PLASTIC CAP

Air-injected GEL core for longer life. Ballistic nylon face resists abrasion and puncture. Superthick memory foam for extreme

comfort. Hard,

smooth plastic cap for easy swivelling. Altalok  $^{\!\scriptscriptstyle\mathsf{TM}}$ strapping system designed for job site conditions.

Proline Gel

161 120 000

### **GEL RANGE**

### NOMAR GEL™ RUBBER CAP

Air-injected GEL core for longer life. Ballistic nylon face resists abrasion and puncture.

Superthick memory foam for extreme comfort. Rubberised cap resists marring. Altalok™ strapping system designed for job site conditions.

Nomar Gel

161 122 000

### FLEXLINE GEL™ FABRIC

Fabric. Air-injected GEL core for longer life. Ballistic nylon face resists abrasion and puncture. Superthick memory foam for extreme comfort. Webstrip™

Surface will not

mark or scratch floors. Altalok™ strapping system designed for job site conditions.

Flexline Gel

161 121 000

#### With Rubber Caps

The rubber cap prevents slipping and leaves no marks on vinvl or wood floors.



With velcro closure straps With buckle

161 106 000 161 106 100

#### With Hard Plastic Caps

With hard plastic caps. The hard plastic Cap is durable on tough surfaces



Velcro With buckle

161 105 000 161 105 500

#### SAFE-TEK™ - Washable

Kevlar - best on wood and carpet



SafeTek

161 109 200

### **SEAMING TOOLS**

### MEDICALS

### **Medical Knee Pads**

Developed with health & safety in mind. These knee pads give total support to the whole knee area, prevent tendon and cartilage damage.

Fast becoming the floorlayer's favourite

CE DIN EN 14404 certified



WITHOUT knee protector: There is pressure on the unprotected knee cap.

WITH knee protector: The knee is cushioned and given total support.



### **FENTO ORIGINAL Knee Protectors**

FENTO original 250gm

161 116 000

Inlays for Fento Original Version 161 116 010

Inlays for FENTO ORIGINAL / 200 / Pro

161 112 100



Spare straps

### **FENTO MAX Knee Protectors**

Pair weight 370gm

161 109 001

FENTO MAX 370gm (pair)
161 119 000

Spare inlays (2pcs) 161 119 010

Spare inlays (2pcs)

161 112 200

### Leather Knee Pads + buckles

These knee pads have 1/" thick padding and single 3/4" wide leather straps with plated metal buckles.

U shaped top and bottom for more comfort on knee and shin.

Leather Knee Pads

G-309



With felt filling & buckles

161 107 000

#### **Protective Linings**

for FENTO Original + MAX Prevent dirt or sand from getting between the protector and the knee.



Protective linings (2pcs)

### **FENTO Board**

Ensures correct pressure distribution over the shin and helps prevent knee/back problems.

- 19" x 11"
- Easy to clean
- Integral handle
- Hard wearing
- Easy slide
- Great for hard floors



### **Kneeling Mat**

Thermal Mould prevents liquids and chemical absorption.

21" x 14"

Kneeling Mat
Order No.161 114 600



### JANSER inserts - Flexipad

H.D. Foam cut to adapt to knee shape



#### **FENTO 100**

Order No.161 114 500

With excellent padding and breathable recovery characteristics.



### **SNICKERS HD beads**

Brock beads circulate air in 3 dimensions. Sweat evaporates



### MATRIX (Redbacks)



### **HEAT BOND IRONS**



### **SEAM WEIGHT**

The Seam Weight has a perforated white plastic base with an air space between the base and steel weight to allow heat and moisture to quickly dissipate. It performs better that a tool box tray because it exerts uniform pressure without discolouration caused by heat retention or by a rusty tool box tray. The white plastic base glides smoothly over the carpet and won't snag like a plywood tool box tray can.

Measures: 6" wide x 12" long x 3 1/4" high. Weighs 16 lbs. 612 SW

Seam weight

612 SW

### **HEAT SEAM TAPE**



### **SEAMING TOOLS**

























### PROFESSIONAL GLUE GUNS





### PROFESSIONAL GLUE GUNS

### **Tec3150**

High output 43mm (1 %) glue gun for industrial use. All-electric & extremely robust. Power-on light with removable integral stand with built in nozzle spanner.

Melt rate 2.0kg (4 ½ lbs)/hr
 Glue Size 12mm (½") glue stick
 Voltage 120V and 230V

Wattage 250WHeater Cartridge

Temp Control Interchangeable thermostat

Hotmelt gun 195°C (380°F)

Lowmelt gun 130°C (265°F)

Power cable 3M (10ft)

Weight 500g (18oz)

Packaging Plain Box (10 per ctn

Tec3150 Glue gun T

TEC-3150

### Tec3400

High output all-electric 43mm (1  $\frac{3}{4}$ ") glue gun for industrial use. Extremely robust with electronic temperature control, automatic standby, plug-in temperature modules & power-on light.

Melt rate 3.5kg (8lbs)/hr

Glue Size 43mm (1 ¾") glue cartridge

Voltage 120V and 230VWattage 400W

Heater Cartridge

Temp Control Electronic plug-in temperature module

Hotmelt gun 195°C (380°F) fitted, 130°C (265°F) and 215°C (420°F) modules included

Lowmelt gun Covered above
 Power cable 3M (10ft)
 Weight 1.15kg (2 ½ lbs)

Packaging
 Plain Box (5 per ctn)

Tec3400 Glue Gun

237 089 000

### 12mm Glue Sticks

5kg (160 sticks) box

237 098 000

2kg (64 sticks) Polybag (237 098 200



### 43mm Glue Slugs

10 Kilo Box (5x2kg) - 170 Slugs 237 098 500

2 Kilo Poly Bag - 34 Slugs

7700PS





#### **TECHNICAL SPECIFICATIONS**

Power Supply 220-240VAC Motor Power 300W
Operating Temperature 130°C - 230°C

(265°F - 445°F)

Glue Stick Ø 12mm Dimensions LxWxH 300 x 85 x 220mm Weight 800gm

KP 3012Glue Gun

237 085 600

### **Carpet Edge Sealing Tips**

These special glue gun tips allow carpet edges to be sealed with any hot melt glue compatible with carpet backings. Edges are sealed better and faster. Also, unlike other sealing methods, no time is lost waiting for the sealer to dry. The unique design of these tips assures excess glue is directed onto the backing of the carpet, and not into the pile.

Carpet edges can even be sealed from a standing position without looking directly at the cut edge. All three tips function the same as the Plenum Area fills with pressurised glue, which is then forced onto the carpet edge. The Relief Area allows excess glue to vent to the carpet backing.



Tip orientation for proper edge sealing - excess glue is directed onto the back



Use adapter valve with glue guns to give perfect adhesive application

No. 4RS Carpet Edge Sealing Tip

For right hand use with standard carpets

No.4RS

TIP-4RS

No. 4LS
Carpet Edge Sealing Tip

For left hand use with standard carpets

No.4LS TIP-4LS

carpets
No.4RE

No. 4RE

Carpet Edge Sealing Tip

For right hand use

with attached cushion

TIP-4RE



Adapter

3630

### STAPLING SYSTEMS

### A11 Staple Hammer Tacker

Easy to use hammer tacker, suitable for stapling fitted carpet, underlays, insulation materials, labels etc.

The A11 is all steel & has only four parts making it very reliable and durable.

A11 Staple Hammer

237 502 000



#### **Staples**

8mm, x 5000	RSH-S2
10mm, x 5000	RSH-S3

### A54 Heavy Duty Staple Hammer

Heavy duty hammer tacker for hard work such as fixing insulation sheeting, roofing sheet materials, heavy fitted carpets etc.

Large protective sheild prevents damage to the material around impact area.

A54 Staple Hammer

237 503 000



### Staple Gun R34 - Heavy Duty



Staple gun R34 **RSH 34** 


Powerful tacker. Suitable for stapling plastic trim, insulation material, carpets etc. to wood.

Adjustable driving force.

#### **Staples**

8mm, x 5000	RSH-S2
10mm, x 5000	RSH-S3
12mm, x 5000	RSH-S4
14mm, x 5000	RSH-S5

### Miscellaneous STAPLE SERIES



80/12	MSR 80/12
80/14	MSR 80/14
80/16	MSR 80/16

91/18	91/18
91/20	91/20
91/22	91/22
90/25	91/25

71/16	71/16
71/18	71/18

All ARROW - RAPID staples available. From stock prices on request.

### **SPOTNAILERS**

#### MET 567 Electronic Stapler

For underlayment work.

Ideal for fast fixing hardboard and plywood, complete with quick clear nose and carry case.

MET 567 - 230V

**MET 567** 

MET 567 - 110V

MET 567 110



- Effortless alternative to traditional Mallet Drive Stapler
- Fix 4 or 6mm ply securely and permanently.
- Vibration free fixing of gripper to treads and risers.
- Fixes deep pile carpets and natural floor coverings.
- Uses standard spot staples as below.

#### **SPOTNAILER 5**

Mallet Drive Stapler. Pre-set countersink for floor underlaying work.



Spotnailer tool

Applications - plywood, hardboard, underlaying.

#### Mallet

Mallet for Spotnailer Tool.



Mallet for spotnailer tool 8002

#### **Spot Staples**



Spot Staples (boxes off 5000)

16mm (1/8") 55DC	513	
19mm (¾") 66DC	518	
22mm (%") 77DC	523	

### Pneumatic Spotnailer - GUN



Pneumatic spotnailer gun only

#### Uses spot staples as above

- 2 HP 10 bar oil-free compressor with pressure regulator, water trap & lubricator
- Kit with 10 metre airline
- Compressor in wheeled case

# Pneumatic Spotnailer - KIT

**Kit 230V** Kit 110V

TS-KIT **TS-KIT-110** 

# STAPLING SYSTEMS

# **ME 4000**

Professional Electronic Stapler

MSR-1

# Janser®

# ME 606

**Professional Electronic Stapler** 

ME-606



- Ideal for cap and band bull noses and open tread stairs.
- Vibration free fixing of gripper to treads and stair risers, around bathroom fittings and architraves.

Available in 230V or 110V

- Narrow-crown bronzed staples are hidden in the pile of carpets, foambacks and natural floor coverings.
- Replaces the hammer-driven nail and strike tacker for fixing ply and hardboard.
- Automatic countersink into hardboard and ply.
- Effortless alternative to the strike tacker or hammer for fixing hardboard and 4 or 6mm ply.
- Gives a secure and permanent fixing.

Available in 230V or 110V

- Vibration free fixing of gripper to treads and stair risers, around bathroom fittings and architraves.
- Will fix deep-pile carpets and natural floor coverings.
- Brad facility not recommended for fixing scotia, quadrant, hardboard or ply.

### ME 4000 STAPLES

Our Maestri 4000 series divergent staples comply with the Contract Flooring Association's recommendations for sub floor preparation. Divergent pointed staples 40/16mm for <a href="https://hardboard.40/20mm">hardboard.40/20mm</a> for ply, gripper and carpets.

16 -20 -

16mm, 10,000 Pieces MSR-16 20n

20mm, 10,000 Pieces MSR-20

# ME 606 STAPLES tri 606 series divergent staples comp

Our Maestri 606 series divergent staples comply with the Contract Flooring Association's recommendations for sub floor preparation. The same staples will fit our 606 pneumatic stapler. Divergent pointed staples 18mm for hardboard, 22mm for ply.

18 -22 -

18mm, 4800 Pieces

606/18

22mm, 4800 Pieces

606/22

### Spares for ME4000

Switch	40130	Spring/Bumper Kit	49012
Driver Blade	42961	Circuit Board	40011

Main Spring 70356

Solenoid 40017

### Spares for ME606

Switch	(40130)	Spring/Bumper Kit	49012

Driver Blade 42825 Circuit Board 40011

Main Spring 70356 Solenoid 40022

# ME 30 Professional Panel Pinner

# IMPORTANT

Use only genuine Maestri staples to validate warranties.

# SE 30/08

**Professional Veneer Pinner** 



### **BRAD TOOL**

- Suitable for secret nailing up to 12mm.
- Great for profiles and thresholds.
- Fix 6 meters per minute
- Pencil thin nose allows for accurate pin placement at any angle

### BRADS

15mm, 7000 Pieces 606-B15

19mm, 7000 Pieces 606-B19

25mm, 5000 Pieces 606-B25

30mm, 4000 Pieces 606-B30

# SE-30-08 PINS

### VENEER PINNER

- Excellent on scotia or wooden trims.
- Leaves no visible pin head.

15mm, 6100 Pieces **VP-15** 

20mm, 6100 Pieces **VP-20** 

25mm, 6100 Pieces **VP-25** 

30mm, 6100 Pieces **VP-30** 

# STAPLING SYSTEMS & TRANSFORMERS

### Pneumatic Coil Nailer Kit MAX-238 KIT

### MAX-MK238 (Collated Coil Nails)

### Kit Comprises:

- Model CN238 Mini Coil Nailer complete with carry case.
- ZH2004K 2hp 10bar oil free compressor, fitted with pressure regulator, water tap and lubricator.
- Compressor supplied in a strong wheeled box as above (20MJ2058).
- 10 metre rubber airline quick release couplings.
- Compressor available in 230V and 110V for on-site use.

Nail gun only - 230V (MAX-CN238



**Ring Shank Nails** Collated Sheet Collated Coil Nails packs of 10,000

**MAX-NAILS 2** 2 x 19mm (ply)

2 x 22mm (hardboard) **MAX-NAILS**:

2 x 25mm **MAX-NAILS** 3

MAX-NAILS 4 2 x 28mm

### **SFN-19 COIL NAILER**



Pneumatic Nailer for driving collated ring shank galvanised nails fitted with adjustable nail depth control. Trigger lock eliminates accidental firing.

Complete with case.

SFN-19 Coil Nailer

**SFN-19** 

Ring Shank Nails Collated Sheet

2 x 19mm (ply)

**MAX-NAILS 1** 

2 x 22mm (hardboard)

**MAX-NAILS** 

Collated Coil Nails packs of 10,000

2 x 25mm

**MAX-NAILS** 

MAX-NAILS 4 2 x 28mm

### SFN-19 NAILER KIT

The SFN-19 Coil Nailer & ZH2004K Compressor **Underlayment Nailing Kits** 

This is the complete Underlayment nailing system.

Just plug in and away you go!



### The kit comprises of:

- Model SFN-19 Coil Nailer complete with carry case
- ZH2004K 2hp 10bar oil free compressor, fitted with pressure regulator, water tap and lubricator
- Compressor supplied in a strong wheeled box
- 10 metre rubber airline quick release couplings
- Compressor available in 240V and 110V for on-site use

Nailing kit - 230V

Nailing kit - 110V

SFN-19 110

### M-K MASONARY NAILER

Fix gripper to concrete on floors and stairs. Fix skirtings and profiles to brick or breeze block walls 10 times faster than other methods

Masonary nailor

MK-LT50 LAC

8 bar



### M-K Nails

Other sizes available 15 - 50mm

20mm nails - 3000 box

20MK

# **TRANSFORMERS**







BATTERY COMPRESSOR NOW AVAILABLE

# **STAPLING SYSTEMS - Pneumatic**

### **COMPACT AIR STAPLER KITS**

Perfect kits for smaller commercial jobs and all domestic jobs

230V Kit

ES40 VT SE

110V Kit

ES40 SS SE

### **German Technology**

- 10 Bar, 240V compressor
- 142 PSi
- 4 Litre tank capacity
- Accepts 606 or ES range staples and Brads

### KIT COMPRISES:

- Gun
- Compressor
- Hose



- 8 Bar, 110V compressor (0.5hp motor)
- Power 1/2 hp (0.3kw)
- 145 PSi
- Tank capacity 3.8 litre
- Accepts 606 or ES range staples & Brads
- Air displacement 34 litres / min.

### KIT COMPRISES:

- Gun
- Compressor
- Hose

Kit 230V

**ES40 VT SET** 

Kit 230V

**ES40 SS SET** 

### **Pneumatic Gun only**



### TECHNICAL SPECIFICATIONS

280 x 55.5 x 216.5mm

Weight

1.14kg

Working pressure 8 - 101.5 psi

Max. Operating presure

101.5 psi

Air consumption 0.52 driving procedure at 87 psi

Pneumatic gun

**ES402XR** 

### Compressor - Mini

3.8 litre PC1010 Compressor has a compact ultra-quiet, portable design with a 0.5HP motor and a 3.8 litre aluminium tank. Offering portable pneumatic power for a wide-range of applications, including 2nd-fix joinery, upholstery, sheathing, pipe-testing, beading and trim. With its low-noise oil-less motor its even ideal in domestic situations. Comes with a comfort grip handle and is designed not to roll about in the back of the van. Max. operating pressure - 154PSI, 8 Bar. Air displacement - 34 Litres/min

- Features
   0.5HP 3.8litre. Oil free
- Draws only 4 amps
- Quick disconnect coupler
   8 Bar



240V

110V

SEN-1

# janser

# QUIK DRIVE KIT FOR PLY

(19mm Screw System)

Eliminate accidental damage to pipework with the 19mm underlayment screw system!

Fasten 6mm ply really quickly and really easily!

### Kit includes:

- Makita FS2300 Driver
- 19mm Adaptor
- 19mm Quik Drive Attachment

### You're ready to go!

**Quik Drive Kit** QDBPC-19EFKEG/FS23







Specially designed high-low thread pattern designed to help stop "squeaking" and possible withdrawal, and they have a compact countersunk head for a flush finish.

19mm Screw - 1500 per box

MTHZ19E

25mm Screws (for wood to wood fixing)

MTHZ25E

25mm Screws (wood to metal fixing)

for wood to metal fixing, e.g. raised access panels etc.

DWF3525PE

# **DOOR TRIMMERS**

# **Door** BOSS by **JANSER UK**

The Door Boss enables doors to be trimmed in situ, in a precise and efficient manner.

The machine features simple thumbscrew adjustments for both height and depth of cut. Changing of the blades is also easy, with the use of the allen key provided. The well proven design of the unit offers the user a comfortable working position, giving maximum control during operation.

The motor is double insulated and a sliding guard ensures user safety. The unit is suitable for AC supply only 220 - 240V.

### The machine is supplied with:

A tungsten carbide blade and comes complete with a robust, lockable, metal carrying case.

BOSS - 230V

228 840 000

BOSS - 120V

228 840 800

### **TECHNICAL SPECIFICATIONS**

Power supply Motor power Speed 230V or 120V 1000W (5.5A) 5300 rpm



Spare Blades Ø184 x 1.6 x Ø20-40K

Tungsten blade

228 852 001



### **Door Trimmer 'TWIST'**

Machine turns 180° and cuts into almost any corner!

Adjustable up to max. 28mm from the base with splinter protection for clean edges without tearing



Cutting expansion joints



Fitting door frames



**Cutting grooves** 



### **TECHNICAL SPECIFICATIONS**

 Power supply
 230V

 Motor power
 660W (0.9HP)

 Saw Blade-Ø
 115mm (4 ½")

 Swivel range
 180°

 Cutting edge
 0-28mm (0 -1 ¾4")

 Weight
 3.5kg (7.72lbs)

**TWIST - 110V** 


228 856 800

**TWIST - 240V** 

228 856 000

# **TWIST**

### **Battery operated Door-Trimmer**

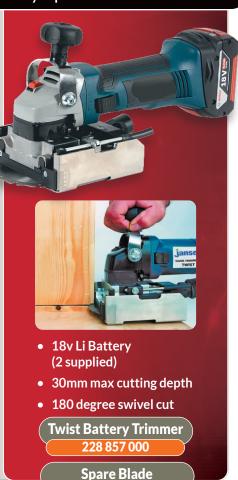

228 856 010

# DOOR TRIMMERS, JAMB SAWS

### **RZ270 Door-Trimmer**



- Powerful 1300 watt motor
- Cutting depth to 47mm
- Cutting height 8 35mm
- Weight 5.6kg
- Blade diam. 165mm
- Spare blades from stock
- 110 v and 240v available

RZ270 - 230V J-RZ270-230

**RZ270 - 110V** J-RZ270-110

Spare Blade J-RZ270-300





# JAMB SAW - for wooden door jambs & base boards

### Long Neck Undercut/Jamb Saw

### Features:

- Dust port
- 1100W
- Adjustable depth guide
- Blade height adjustment 0-30mm
- Cuts up to 43mm thickness
- External "tail" gives max. leverage
- Easy access trigger for more control
- Strong moulded carry case
- Supplied with carbide-tipped blade



Spare blade- long neck

Long neck PLUS - now with masonry blade

Ideal for trimming door frames



Spare blade- Standard



Jamb saw inc. carry case

Jamb saw 110V inc. carry case

1056 110

### **SUPER SIX 6" Jamb Saw**

- Adjustable cutting depth guide prevents cutting into plaster or wall board when trimming base boards
- Powerful, 900 Watt industrial grade power unit has all ball and needle bearings
- Patented design enables saw to cut full inside corners in moulding up to 1/2" thick

### (110V only)

- · Spiral ground gears for smooth, quiet operation
- Precision height adjustment from 'flush' to 1 1/16"
- Doors as thick as 1 3/4" can be undercut without removal
- Includes 6 3/16" 36 tooth carbide tip blade
- custom moulded carrying case



# HAND SAWS, MITRING & SHARPENING

















### **Diamond Sharpener Block**

The Leader in Diamond Sharpening! Sharpens blades, quarter moon knives and other tools.



Diamond block 262 890 000

F70 Diamond Whetstone that travels with you. It has a flip open lid/handle and a swivel ring for a key chain. 140mm when open, this is the perfect pocket knife accessory. Effective on the hardest stainless steel blades, tools and sporting goods. Handle folds easily for protected storage





which can be joined together enabling precise intricate pattern work to be done. Floorboards can be precisely marked in a time saving manner. Case of 2 templates, 20cm (7 3/4") each & 1 setting angle 40mm (1 1/2")

Profile Master

464 066 000

# MIRKA-DEOS Hand Sander - New Model



### **Orbital sander DEOS**

At only 10cm high, the tool's compact and very low profile gives a high manoeuvrability and helps deliver a precise and efficient sanding performance.

This small and light sander is naturally equipped with a brushless motor and is particularly suitable for filler sanding.

The optimised ergonomics enable a comfortable grip.

### Accessories for DEOS

### **TECHNICAL SPECIFICATIONS**

protective pad 70 x 198mm

230V Power supply Motor power 250W 500-10.000/min Speed Orbit 3mm 70 x 198mm Size of pad Weight 1kg

MIRKA-DEOS

448 110 500



448 110 060 (50)Grit 60 (50)Grit 80 448 110 080 Grit 100 (50) 448 110 100

448 110 120

Grit 120 (50)

Soft Pad - 70x198mm

1 pcs 448 110 020 Pack of 5 pcs 448 110 010



Curved Pad - 70x198mm

1 psc

448 110 030

# **TOOLS FOR WOOD & LAMINATE FLOORS**



### Floor Wedges

Floor wedges make it easy to ensure the correct distance between the wall and floorboards.

### Advantages of the iTOOLS floor wedges are:

- Easily adjusts from 8-15mm
- Keeps its setting
- Greatly facilitates the laying of the initial boards
- Can be used for all types of floorboards
- Easy to detach the floor wedge using the uniquely designed strap
- Can easily be taken apart and then quickly be deployed again

20 pieces in blister pack 464 055 840

100 pieces in blister pack 464 055 830



### Installation Set for Wooden Floors


- 20 fitting edges 4x5.5cm (1 ½" x 2 ¾16")
- 1 plastic fitting block
- 1 chisel, felt-protected 29x3cm (1"x 1 3/16")


Parquet Shunting Tool

440 005 000

440 006 000

464 052 300







464 059 000

For setting the tension of parquet and laminate flooring.

Clamping capacity: 4m (13")

Extension strap available: Length 4m (13') with clamp

> **Extension Strap** 464 059 012

### Wall Spacer



The handy wall alignment brace for setting the distance to the wall and adjusting the tension of the floorboards

464 055 000

Short, 43cm (17")

Long, 55cm (22")



### SHUNTING DEVICES

- Combines shunting and hammering
- No damage to tongue and groove
- Easy access under radiators

### **LUKAS Senior**

With extension Necessary for shunting underneath radiators





### **LUKAS Junior**

Without extension



464 090 000

# **TOOLS FOR PARQUET & REPAIR KITS**









Colours Parquet Repairing Box Spare sticks size 01 to 16gm

Spare wax sticks can be purchased individually (see right)

### Case contains:

- 21 Hard Wax Plus colours
- 1 Hard Wax
- 1 File
- 1 Hot knife, gas operated
- 1 Sanding Fleece
- includes colour mixing aid



Melting Putty Set -20 475-020-000

### 475 025 105 Pine 475 025 108 Larch 475 025 110 Fir antique Natural oak 475 025 111 Cherry tree bright 475 025 114 475 025 116 Cherry tree antique 475 025 119 Light walnut 475 025 143 Elm (bright light) Red 475 025 152 Yellow 475 025 153

Spare Wax Sticks		
-1		
475 025 105	Green	475 025 154
475 025 108	Transparent	475 025 164
475 025 110	Pine cone	475 025 168
475 025 111	Beech nature	475 025 171
475 025 114	Beech bright	475 025 172
475 025 116	Spruce transparent	475 025 176
475 025 119	Kronospan D 381	475 025 179
475 025 143	White RAL 9016	475 025 191
475 025 152	Black-grey	475 025 410
475 025 153	Steel blue	475 025 452

### NOVORYT Special Set 40 for trend surfaces

Special colour composition for design, laminate, linoleum and real wood floors

### Melting Kit Set 40 SPECIAL included in plastic case:

- 40 pcs. NOVORYT melting putty
- 5 pcs. retouch pens, valve system
- 1 hot knife, gas operated incl. spare gas bottle
- 1 plastic spatula
- 1 stripping blade
- 1 cleaning cloth for hot knife
- 2 sanding fleece

Replacement colours can be ordered separately



475 020 400
475 020 000
475 020 060

### Retouch Pens valve system

### Pens which don't dry out

10 pcs. retouch pens, valve system wood colour varnish in PET-Box and 10 pcs. replacement tips

### Includes:

beech natural cherry light larch alder walnut

mahogany teak oak light oak dark spruce



**Retouch Pens** 475 020 450

### Melting Putty Set

This medium hard repairing kit is made for heavily used surfaces such as parquet, laminate, cork flooring, furniture, kitchen surfaces etc.

Heated with a gas or battery melter and applied in liquid form

### Special features:

- used on all smooth surfaces, that is, Parquet, cork, laminate, resin, rubber, linoleum, stone, plaster etc.
- extremely good adhesion even at very small damage in
- does not become brittle has a certain elasticity.
- can also be used in the corner and edge area without break out after a short time.

The melting putty us available in over 125 different colours. Other colours available on request.


### Melting Kit Set 20


Included in plastic case:

- 20 pcs. NOVORYT melting putty
- hot knife, gas operated incl. spare gas
- plastic spatula



# **LAMINATE GUILLOTINES**

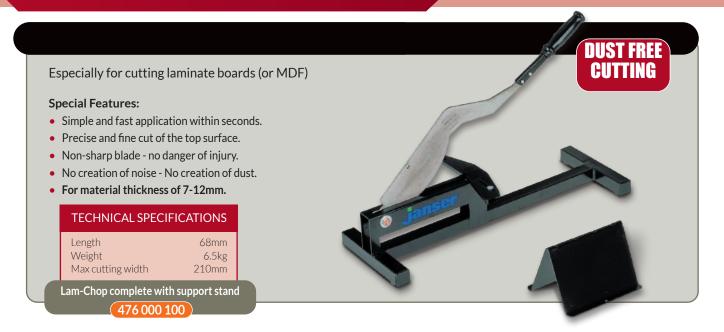

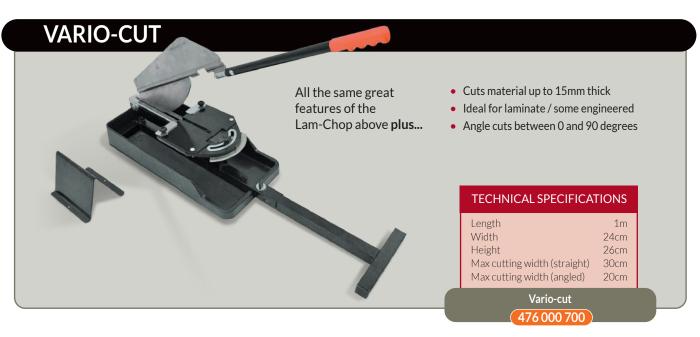



# LAMINATE GUILLOTINES

# **ECONOMY** Laminate Guillotine

### Features:

- Low cost
- Safe and easy
- Fast and accurate
- Silent and virtually dust free
- Solid construction

### **TECHNICAL SPECIFICATIONS**

Cutting width200cm (8")Cutting thickness $11mm (7_{16}")$ Cutting angle $90^{\circ}$  facility

Roughneck guillotine

**RNG ECON** 



### Parquet Cutter LX-340

### uses:

prefinished wood flooring, vinyl material, wood mouldings, laminate, etc.

- · Fast and precise
- Quiet and dust-free
- Lightweight and portable
- Long-lasting and economical
- With built-in laser and mitre-guide

Parquet Cutter LX-340

476 000 900

Spare blade

476 000 910





# **PARQUET Installation Ring**

High-quality tool for laying parquet flooring.

For pushing / pressing on parquet/engineered strips without risk of damage to edges/surfaces.


More effective and robust compared to conventional rubber mallets.

Suitable for all laying patterns.

Weight: 1,064kg (2.34lbs)

Parquet installation ring

464 082 000

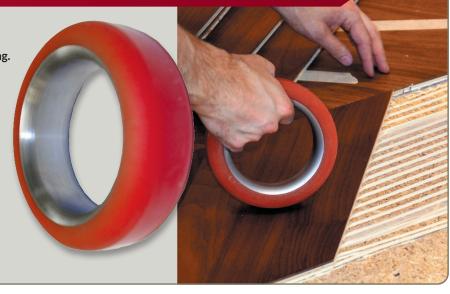

# **ABRASIVES FOR SANDING**

### SANDING BELTS • SANDING ROLLS • SANDING SHEETS • DISCS



### TIGER / LEOPARD / Hummel / Viper

### Standard Quality 750 x 200 mm (29½ x 8")

Per piece	Order Code
Grit 16	441719000
Grit 24	441 720 000
Grit 30	441721000
Grit 36	441 728 000
Grit 40	441 722 000
Grit 50	441 723 000
Grit 60	441 725 000
Grit 80	441 726 000
Grit 100	441 727 000
Grit 120	441 729 000

### **TOP Quality**

750 x 200 mm (29½ x 8")

Per piece	Order Code
Grit 16	441 770 000
Grit 24	441771000
Grit 36	441 773 000
Grit 40	441 774 000
Grit 50	441 775 000
Grit 60	441 776 000
Grit 80	441 777 000
Grit 100	441 778 000
Grit 120	441 779 000
Grit 100	441 778 000

### **JANSER Sanding Belts**



### for centrifugal sanding drum JAGUAR/PANTHER/ HARLEQUIN

### Standard Quality 480 x 200 mm (19x8")



### for sanding drum **PROFIT**

Standard Quality

550 x 200 mm (21½ x 8")

Per piece	Order Code
Grit 16	441 908 000
Grit 24	441 901 000
Grit 36	441 902 000
Grit 40	441 903 000
Grit 50	441 904 000
Grit 60	441 905 000
Grit 80	441 906 000
Grit 100	441 907 000
Grit 120	441 910 000

### **Premium Quality Sanding Belts**

With zirconium corundum and extremely wear-resistant Y-cloth backing.



# TIGER / LEOPARD / Hummel / Viper

**Premium-Quality ZIRKON** 750 x 200 mm (29½ x 8")

Per piece	Order Code
Grit 24	441 710 000
Grit 36	441711000
Grit 40	441 712 000
Grit 60	441 713 000
Grit 80	441 714 000
Grit 100	441 715 000
Grit 120	441716000

### **Sanding Paper Rolls**



DRUM SANDING MACHINES	
Standard Quality Width 200 mm (8")	
Roll 50m (164")	Order Code
Grit 16	441 539 000
Grit 24	441 540 000
Grit 36	441 541 000
Grit 40	441 543 000
Grit 60	441 545 000
Grit 80	441 546 000
Grit 100	441 547 000
Grit 120	441 548 000

# VELCRO SANDING DISCS 6" & 7"

St

### Ø150mm

**PANDA** 

Standard Quality



Per piece	Pack of	Order Code
Grit 16	(25)	444 101 100
Grit 24	(25)	444 101 200
Grit 36	(25)	444 101 400

1 200 1 400 Grit 40 (50)444 101 500 Grit 60 (50)444 101 600 Grit 80 (50)444 101 700 Grit 100 (50)444 101 800 Grit 120 (50)444 101 900

### Ø150mm



Per piece	Pack of	Order Code
Grit 16	(25)	444 802 016
Grit 24	(25)	444 802 024
Grit 36	(25)	444 802 036
Grit 40	(50)	444 802 040
Grit 60	(50)	444 802 060
Grit 80	(50)	444 802 080
Grit 100	(50)	444 802 100
Grit 120	(50)	444 802 120

### Ø178mm

PUMA/FOX



HF180 Caddy	
	100
andard Quality	

Per piece	Pack of	Order Code
Grit 24	(25)	444 035 200
Grit 36	(25)	444 035 800
Grit 40	(50)	444 035 300
Grit 60	(50)	444 035 400
Grit 80	(50)	444 035 500
Grit 100	(50	444 035 600

### Ø178mm



Per piece	Pack of	Order Code
Grit 16	(25)	444710016
Grit 24	(25)	444 710 024
Grit 36	(25)	444710036
Grit 40	(50)	444 710 040
Grit 60	(50)	444710060
Grit 80	(50)	444 710 080
Grit 100	(50)	444 710 100
Grit 120	(50)	444 710 120

# PRE-COATING ROLLERS & APPLICATORS



- 290-310 cartridges
- Thrust ratio 12:1
- Double transmission

334 510 012

Viscosity 4

- 290-310 cartridges
- Thrust ratio 26:1
- All metal construction
- Viscosity 6 Max.

334 510 026

# bags to save roller heads/brushes from drying out 50/box

**EWB-50** 

### Super Fastgrip

Powerful rapid setting for gripper, stair nosings etc 310mm

> 310ml 334 500 200

# SEALANTS

Mapesil AC - Clear
Silicon - 310ml

Clear silicon

### Mapesil AC - White

100% Silicon solvent free. Great for sealing wet areas, tiles, skirtings etc.


White silicon MAP-100

### SK-1 Adhesive

for fixing skirting boards/panels, high initial tack

> 290ml 334 068 000

# iantac



silicone-treated paper acrylic adhesive PSTR-fibre net acrylic adhesive

### 25mm JANTAC



50m roll, Box quantity - 20 rolls 640 000 500

### 50mm JANTAC



50m roll, Box quantity - 10 rolls 640 003 000

# The **No 1** Impact Tape

Lab proven unrivalled adhesion level

Jantac is a double sided acrylic tape.

The pure acrylic adhesive has viscoelastic qualities, doesn't dry out nor does it become brittle.

Jantac is used for fitting carpet skirting boards or any other material which can no longer be fixed with conventional transfer adhesive.

### Fitting of skirting boards

Dry adhesive is used in many areas of the floor laying industry. It has no drying time and there is no need to ventilate the room you are working in. It can also be removed very easily

### Tape widths of:

25mm (1"), 40mm (1  $\frac{1}{2}$ "), 45mm (1  $\frac{2}{3}$ "), 50mm (2"), 55mm (2 1/8"), 70mm (2 3/4"), 85mm (3 1/3")

### 55mm JANTAC



50m roll, Box quantity - 10 rolls 640 004 000

### 85mm JANTAC



50m roll, Box quantity -6 rolls 640 005 000

### **Black Waterproof**



Single sided Gaffa Duct 50m roll

Box quantity - 24 rolls 640 020 500

### Silver Waterproof



Single sided Gaffa Duct 50m roll

Box quantity - 24 rolls 640 020 800

### **Anti Plas**



Non migratory 250mm

Box quantity - 12 rolls 640 020 750

### **NEC-Easi Peel**



Exhibition approved - leaves no residue. 50m roll.

Single roll

EPT-1

### **Double Sided**



50m roll

Box quantity - 24 rolls 640 020 600

### **Butyl Tape**



75mm 25m

Creates moisture vapour barrier and strengthens underlay

Single roll

VBT-I

### Polycoated Cloth



Black Silver Blue White Red Yellow

Suitable for external use, water resistant

Single roll - 33m x 50mm

### Carpet Binding Tape



33m x 38mm roll. Beige

Single roll

CBT-1

### Floor Marking Tape



Black Green Blue White Red Yellow

50m x 50mm roll

Single roll

FMT-1

### **Packing Tape**



50m x 50mm roll. Brown. Low noise

Pack quantity - 6 rolls

### Masking - Low Tack



Very easy to remove


Single roll MSK-2

### Hazard - Red/White



HT-RW

### Hazard - Black/Yellow



HT-BY

### Rug-Stix 2 1/2" x 25'



No residue left after use.

Single roll

**RS-025** 

### Mushroom Tape



For felt back carpets, hooks and grips.

Single roll

MTA-1

# NAILS, CORK PINS, GIMPS, TAP ITS, BLUED TACKS











**Gimp Pins** 












# SPRAY ADHESIVE RANGE



# LIFTING & MOVING AIDS

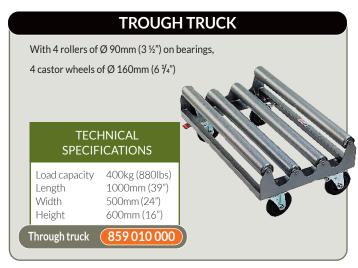







# TRANSPORT & HANDLING


















# **TRANSPORT & HANDLING**

### **High Back Trolley**



### **COMPLETE WITH PUNCTURE PROOF** WHEELS "WILL NOT LET YOU DOWN"


- Made in the UK
- Concave cross-members
- Strong knuckle guard
- High quality powder coated steel



Wheels sit within the frame to aid manoeuvrability through doorways and corridors

859 023 000

### 'P Handle' Sack Truck

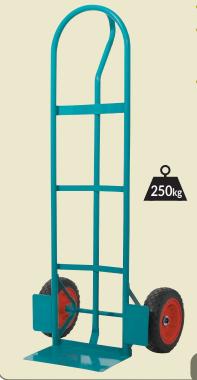

- Puncture proof wheels
- High quality steel with agua-blue powder coated finish
- P Handle allows trolley to be laid horizontally for ease of loading especially useful for pulling off lengths of material

### **TECHNICAL SPECIFICATIONS**

Load capacity 250kg (550lbs)

> Weight 10kg

Dimensions 1310x520x460mm

> Tyres Puncture proof

P Handle Trolley 859 005 000

### **TECHNICAL SPECIFICATIONS** 230kg (507lbs) Load capacity

Weight

14kg

Dimensions Tyres Guarantee

1410 x 580 x 500mm Puncture proof 3 years

High back trolley

# The ROLLI

Rolli is a great labour-saving handling device on site or in the warehouse.



### Heavy vinyl/lino rolls can be unrolled easily!

Compact unit is ideal for van use, without taking up valuable space. Ideal for bowls and cricket mats.

**WORK SMART-SAVE YOUR BACK!!** 

For a 4m roll 3pcs "Rolli" recommended

For a 2m roll 2pcs "Rolli" recommended

### **TECHNICAL SPECIFICATIONS**

Weight 4.2kg Dimensions LxWxH Roller on bearings Local capacity

30 x 23 x 10.5cm 3pcs max. 350kg



ROLLI - 1 piece

859 016 000

### **Linoleum Dollies**

These popular dollies help solve sheet vinyl handling problems.

They are sturdily constructed to give many years of maintenance free service. They feature non-marking rubber wheels with a 480lb load capacity, and the end frame members are made from sturdy aluminium alloy castings. Both ends have a hand hole for carrying. The rollers are supported on both ends by bar bearings, and are made from heavy gauge steel tubing to resist denting. Both models will accommodate rolls up to 16" in diameter. Rollers have a black powder coat finish. Fixed wheels non swivel. Suitable for moving/storing roll up mats and carpets in sports halls, ballrooms, schools community centres, etc.



18" Long dolly No. 15

36" Long dolly No. 25

### Wheel Lock Dolly

Load approx. 120kg Swivel wheels 2 x 60mm Ø rollers 670mm long x 280mm wide



Wheel lock dolly

859 018 000

# TRANSPORT & HANDLING

### Tile Layer's Dolly

For faster, easier tile laying work.



This dolly is made from solid 34" hardwood and has a lacquered finish. Has four ball bearing swivel casters with 2" diameter polypropylene wheels. Can also hold miscellaneous equipment and adhesive buckets. Measures 12" wide x 20" long x 4" high. Dolly has a 600lb capacity. Weighs about 9½ lbs.

Tile layers dolly

**TLD** 

# **Bucket Dolly**

- 136kg (300lbs) capacity.
- Virtually impossible to tip due to low centre of gravity.
- · Castors for easy turning.
- Max bucket diameter 280mm (11")

**Bucket dolly** 

102-BD

# 3-Wheel Dolly

For moving heavy furniture/equipment. 200kg (440lbs) max load capacity. Height 60mm.

4 per set.



3-wheel dolly x 4 pieces

3WD



### **YANKEE - Super Duty**

- Lift, move and wind rolls of carpet/vinyl with ease
- 20cm locking castors & safety lock



852 146 002 2m complete

852 146 004 4m complete

852 146 005 5m complete

# LIFTING & MOVING AIDS

### Claw Lifter - Square Panels

Square panels, square spiked for lifting tiled carpet flooring covering.

Claw lifter - square panels

PLCS-1

# Claw Lifter - Round Panels For lifting tiled carpet floor coverings.

Claw lifter - round panels

262 428 200

### Vacuum Lifter

For lifting up tiled floor coverings with smooth surfaces, e.g. synthetic materials, rubber coverings with studs, linoleum and ceramic tiles.

Vacuum lifter

262 428 100



### **Suction Lifters**



For transporting panels and for making adjustments when laying floor coverings



Double headed 262 428 000

Economy SPP-1

### **EZ Moves - PRO SLIDES**

Available in 4 inch and 6 inch versions

Great to easily move heavy appliances/furniture. Long enough for good access to large items.

Can be used with large pull handles PH-1 (not illustrated)

4" - 2 per set

933

4" - 2 per set

Pull handles - set of 2

PH-1

### product dimensions:

4' EZ Moves

(6 \%" wide x 42 \%" long foam)

6' EZ Moves

 $(6\sqrt[7]{8}" \text{ wide } \times 66\sqrt[4]{2}" \text{ long foam)}$ 

Rounded ends deflect rather than gouge anything that comes in EZ Moves.



### **ACTIVE PRO Stretch TROUSERS**

# janser

**NEW** Stretch-material for comfort and mobility

Colour: BLACK - (Available sizes 44-62) Material 65% polyester, 32% cotton, 3% elastane

### Features:

- Many pockets with and without flaps
- Practical cargo pocket on the leg with integrated mobile phone pocket
- Additional small cargo pocket on the right leg
- Folding ruler pocket with integrated knife holder and pencil compartment
- Knee pad pockets made of particularly durable fabric
- Multi-purpose eyelet for snap hook
- Leg length can be extended by 6cm (sizes 44-62), already hemmed, only unpick one seam to lengthen

# SIZE CHART TROUSERS Champ + Active Pro Stretch

Clothing size*	44	46	48	50	52	54	56	58	60	62
Body height cm	176-188	176-188	176-188	176-188	176-188	176-188	176-188	176-188	176-188	176-188
Leg length cm	83-89	83-89	83-89	83-89	83-89	83-89	83-89	83-89	83-89	83-89
Waist size cam	77	81	85	89	93	98	103	107	113	117



\*Please add your clothing size to the last 2 digits of the order number.

Active Pro Stretch Trousers

122 521 \*\*\*

### **General Purpose Dust Mask**

Disposable and lightweight for non-toxic dusts and easy breathing.



50 per pack

119 000 000

### **Pro. Flooring Booties**

VINYL BOOTIES - For carpet & other textile flooring as well as for wet hard surface flooring. WATER RESISTANT & SLIP RESISTANT.



CLOTH - For parquet floors & other hard surface flooring. ABSORBANT TO LIQUID & SLIP RESISTANT.

Vinyl - x10

119 601 000

Cloth - x10

119 600 000

### **Dust Mask** Mod 3505

### PROTECTION LEVEL FFP3 SD

Active foam with climate valve. Protects and reduces risk from disease inducing wood dust. Large filter area and new folded filter

means long life and reduced costs.

5 per pack

119 300 000

### **Dust Mask** Mod 2495

### PROTECTION LEVEL FFP2

With SoloBand® Climate Valve® EN 149:2001, PVC Free. FFP Mask with Dura Mesh outer lining. Comfortable nose seal. Easy to put on & take off, even with gloves.


1 piece

119 250 000

# **Shoe Covers Blue**

For floor layer's shoes

Made of durable fabric, fused with a rubber sole. Can easily be pulled over any floor layer shoe.



size 43 - 45 size 46 - 49 119 602 004

### **Back Support Belt**

For carrying heavy loads or when bending. The elastic material ensures normal easy velcro fastening.

	THE RESERVE OF THE PARTY AND ADDRESS.
Medium	161 100 980
Large	161 100 984
Extra Large	161 100 983
Extra Extra Large	161 100 986

### Fingerless Gloves

With Techno Grip® strengthed surface for better grip and protection.



Large - 1 pair 119 800 100

XLarge - 1 pair 119800 200

### **Cut Resistant Gloves**

Grey Polyurethane Coated Cut 5 Gloves which are highly cut resistant, with excellent grip and flexibility.

The palm and fingers are coated with polyurethane and have a knitted seamless liner.



Large

**CRG** Larg

XL **CRG XL** 

# **ECONOMY GLOVES & OVERSHOES**

### **Latex Gloves**

Single use, non-sterile and lightly powdered



Large 100 pkt

DLG-

Medium 100 pkt **DLG-M** 

### **Vinyl Gloves**

Vinvl disposable Pre-powdered



Large 100 pkt 675052

### **PVC Gloves**

Red comfortable knitted wristband



1 pair

### **Overshoes**



10 pairs

119 601 100 100 pairs

119 601 200 2000 pairs

# **ULTRAGRIME** Wipes

# The only wipe you'll ever need FLOORLAYERS FAVOURITE!

- 100% bigger than standard wipes, moist & usable for over 1 hour
- Do not dry out even if left open
- Natural solvent, powerful yet kind on hands
- Safe on all surfaces
- Traps & removes PU glue, foam, paint, silicone, grease, grime & much more
- BIODEGRADABLE!



Ultragrime XXL (80 pack) 119 999 59

# **TOOL BOXES**

### FatMax® Bag on Wheels

Soft bag on wheels made from 600 x 600 denier fabric which resists cuts and scratches. It has a rigid, bulky structure design and multiple internal and external pockets. It also has hard wearing removable dividers.



Dimensions: 460 x 330 x 450mm

Wheeled bag

**FMWTB** 

### STANLEY Tool Box - 26"

- 26" HD Tool Box
- Soft rubber bumper corners
- 24" tray

STANLEY Tool box 097 94 24

Tool

Tools not included

All other Stanley Tool Bags available



### Canvas Tool Box - 30"

- 30" HD canvas tool box
- Zip fastener
- Studded fibre board base
- 2 end pockets

Canvas tool box

CVPT-30

### Zipped 24" Tool Bag

This Zip Top Holdall is made from heavy duty polyester with a reinforced backing and heavy-duty zip fastener. Side opening for easy access. The PVC hard bottom side is waterproof.

Zipped 24"

FA1H24HB

Long enough to hold kneekicker





Webbing handles

### **CANVAS TOOL BAGS**

- 30" (760mm) Canvas
- Very strong canvas bag double stitched seams

Webbing handles

( 262 491 000 |

Rope handles

262 492 000



Rope handles

# Starter Carpet Fitting Tool Kit

### **Contains:**

- Carry case
- Janser conventional Knee Kicker
- All staple hammer
- Dolphin knife
- Tack and moulding lifter
- Chalk line
- Gripper shears
- Wide stair tool
- 8M tape
- Box staples 8mm

Starter carpet fitting tool kit

BCFK-1



# PACKAGING & LABELLING



895 000 001

### **LAY-FLAT Polythene Tubing Protective Rolls**

Handles

- Eco Friendly made from POLYLITE
- EXTRA LONG ROLL 320m x 660mm wide
- HD 250 gauge

Pack of 10 rolls 895 000 000

• Protect carpet and vinyl cuts

LAY-FLAT Protective Roll
LFT-26











# **FLOOR PROTECTION**



# WHIPPING & CUTTING

# Miniket®2000



A universal machine suitable for carpets, mats and carpet skirtings. This handy whipping machine utilising the latest technology offers every specialist carpet business and every carpet seller new possibilities to create more desirable products, set up more attractive displays and give a faster whipping service.

The Miniket<sup>®</sup> 2000's capability of whipping very deep-pile carpets with latexed jute backing is unrivalled. Surplus off-cuts of carpet can be quickly and effectively turned into bathroom mat sets, door mats, runners or carpet skirtings.

Miniket 2000

(658 000 000)



### WHIPPING MACHINES YARN / EDGING TAPE / THREAD / BINDING TAPE

# Twisted Polyamide Yarn



Industrial grade nylon filament yarn, in spools of 1kg" - please specify colours required - colour chart available.

> 1 piece 658 6 \*\*\*

### Whipping Tape



Material is cotton indanthrene bias binding **11 colours** 

1 piece 658 \*\*\* \*\*\*

### **Thread for machines**



Sewing thread made of polyester/cotton mixture, approx. 2500m (2735 yds) per spool.

Available in 9 colours

1 piece 658 80\*

### Line Thread



Single strand, nylon transparent, grade 850 Den Large Reel 250g (8.8oz) for Miniket 2000

1 piece 658 808 100

### Jumbo Reel 695g (25oz)



For Maxiket and industrial whipping

1 piece 658 808 000

See www.janser-uk.co.uk for yarn colours available.

# **CONDITIONS OF SALE**

Quotations by the Company are invitations to treat. A contract only arises on the Company's written acceptance of an order. No subsequent variation shall bind the Company unless confirmed in writing.

The Company may without notice make such adjustments of contract price as it shall consider appropriate having regard to changes in cost of production, overheads, transportation and insurance. Goods will be charged at prices ruling at date of despatch.

Goods invoiced at £200.00 or over will be despatched carriage paid within the United Kingdom. Carriage on orders less than £200.00 will be payable by the buyer at cost.

The Company will not accept responsibility for any damage to goods or shortage in quantity of goods unless reported to the Company and to the Carriers in writing within 3 days of delivery, nor for non-delivery unless reported in writing to the Company within 10 days of date of invoice. If these conditions are not fulfilled the carriers may repudiate liability and the Company cannot enquire into the complaint and will look to the Purchaser for payment in full.

Until the Buyer has paid the price in full, the property in the goods shall not pass to the Buyer and the Buyer shall be obliged to store the goods in such a way as to enable them to be identified as the property of the Company. So long as the property in the goods remains in use and if payment of the price or any part thereof shall be overdue, without prejudice to any other remedies we shall be entitled to at any time to recover and resell the same and for these purposes to enter upon any premises of the Buyer and to retake possession of the goods.

Where the property in the goods has not passed to the Buyer, the Buyer shall be entitled to sell the same, but any such sale shall be deemed to be for our account and any proceeds thereof shall be held by the Buyer as Trustee for the Company until the price is paid in full. Upon notice from the Company, the Buyer shall be obliged to assign all rights that he has against his customers.

No responsibility is accepted for goods returned without the Company's prior written authority. Return freight and a handling charge of 10% of net billing price will be charged unless the Company is at fault. The Buyer shall insure the goods for the period covering the return to the Company's works.

### **TERMS OF SETTLEMENT**

Payment by Account Holders strictly 30 days from date of Invoice

Interest is payable on any account becoming overdue in accordance with the stated settlement terms, and will be calculated at the rate of 2% per calendar month.

Value Added Tax will be charged on the total invoice value at the standard rate.

All JANSER products are of the finest quality and workmanship and are warranted to be free from manufacturing defects, and faulty material of which the Company receives written notice within six month from delivery will be replaced. No other guarantee is given and any other express or implied warranty or condition, statutory or otherwise, is hereby excluded.

All contracts shall be governed by and construed in accordance with English Law.



Germany

Hungary

Czech Republic

Switzerland

Poland.

Janser Group Great Britain

Italy

France

Croatia

Austria



Janser UK Limited

Coombs Wood Business Park

Coombs Wood Way

Halesowen

West Midlands

B628BH

t: 01215615888 order line: e: sales@janser-uk.com 01215615888

www.janser-uk.co.uk